

Digital Mixer Amplifier with Multimedia Player 500W



Mixer Amplifier

DESCRIPTION

The NVS-90330501MA is a multi-functional Mixer Amplifier incorporated with the functions of USB flash disk, FM and Bluetooth. It support 100V constant voltage output and 4-16Ω constant resistance speaker output. It is equipped with 3 Mic, 2 AUX, 2 EMC for audio input and with SIREN short circuit trigger function, which can be remotely controlled by this machine or controlled by other devices, with independent alarm output. It is an ideal choice for class rooms, factories and restaurants.


FEATURES

- ⊙ User-friendly and easy to use
- ⊙ Built-in Bluetooth, FM and USB function
- ⊙ Segment code tube screen and intuitive display
- ⊙ Controlled by the infrared remote controller
- ⊙ Equipped with master volume control
- ⊙ SIREN short circuit trigger function
- ⊙ MUTE short circuit trigger function
- ⊙ Equipped with power-off memory function

Specifications	
Model	NVS-90330501MA
Rated Power	500W
Frequency Response	Mic: 120Hz-12kHz (±3dB) Line: 80Hz-15kHz (±3dB)
Sensitivity	Mic:10mV±1mV Line:350mV±50mV
Total Harmonic Distortion	<1%
Speaker Output	100V, 4-16Ω
Tone Adjustments	Treble: 10dB (±2) Bass: 10dB (±2)
Power Supply	AC110-AC115V or AC220-230V 50/60Hz
Weight	6.3kg
Dimension	430×380×88mm


Digital Mixer Amplifier with Multimedia Player 500W

FRONT PANEL

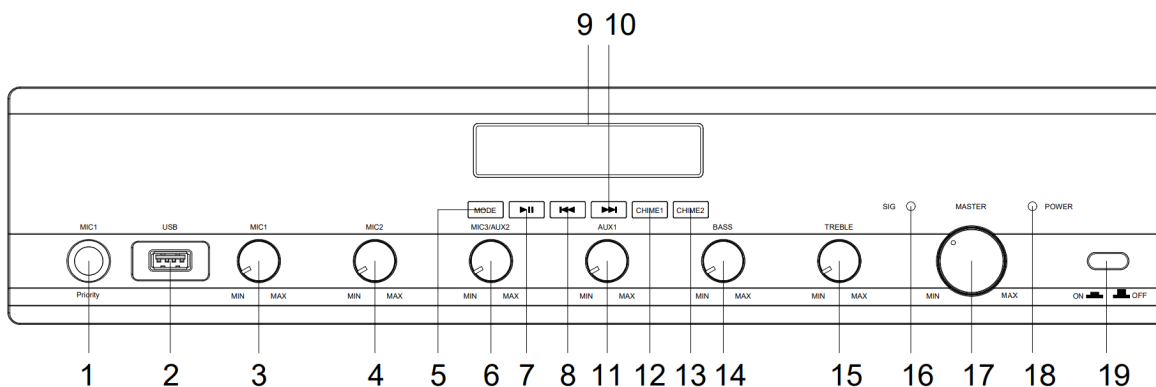

- | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. MIC1 IN 2. USB Port 3. MIC1 Volume Control 4. MIC2 Volume Control 5. Mode Button 6. MIC3/AUX2 Volume Control 7. Play/Pause Button 8. Previous Song 9. Display Screen 10. Next Song | <ol style="list-style-type: none"> 11. AUX1 Volume Control 12. Chime 1 Button 13. Chime 2 Button 14. BASS Volume Control 15. TREBLE Volume Control 16. LEVEL LED 17. MASTER Volume Control 18. POWER LED 19. POWER |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

REAR PANEL

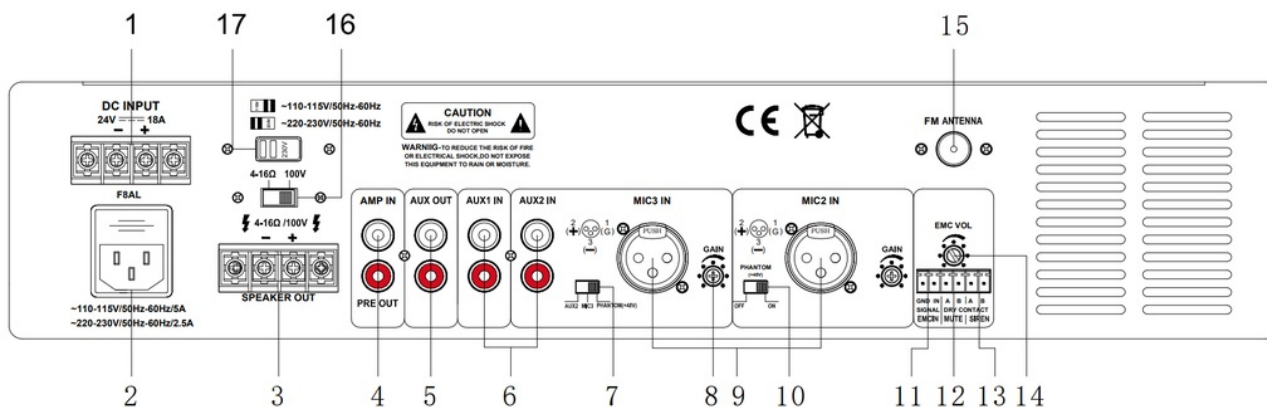

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. DC +24 Power IN 2. Power IN Socket 3. Constant Resistance and constant voltage output end 4. Extended Preamplifier Interface 5. AUX OUT 6. AUX1 IN and AUX2 IN 7. Audio Source Selection Switch 8. MIC Gain Control 9. MIC2 and MIC3 Balanced IN | <ol style="list-style-type: none"> 10. Phantom Power Switch 11. EMC Trigger IN 12. MUTE Short Circuit Trigger 13. SIREN Short Circuit Trigger 14. Alarm Gain Control 15. FM Antenna 16. Constant resistance & constant voltage switch 17. AC Power Switch |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Digital Mixer Amplifier with Multimedia Player 500W

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90330501MA	Digital Mixer Amplifier with Multimedia Player 500W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
FM Antenna	01
Remote Controller	01
Power Cord	01
6P Green Plug with Lock	01
2-pin RCA SC Cap	01
Handle	02
Plastic Washer	04
Cross Recessed Countersunk Head Screw Black /3x8	04
Cross Recessed Raised Countersunk Head Screw Black /5x19	04
User Manual	01
Warranty Card	01
Certificate	01