

# Digital Mixer Amplifier with Multimedia Player 350W



Mixer Amplifier

## DESCRIPTION

The NVS-90320351MA is a multi-functional Mixer Amplifier incorporated with the functions of USB flash disk, FM and Bluetooth. It support 100V constant voltage output and 4-16Ω constant resistance speaker output. It is equipped with 3 Mic, 2 AUX, 2 EMC for audio input and with SIREN short circuit trigger function, which can be remotely controlled by this machine or controlled by other devices, with independent alarm output. It is an ideal choice for class rooms, factories and restaurants.


## FEATURES

- ⦿ User-friendly and easy to use
- ⦿ Built-in Bluetooth, FM and USB function
- ⦿ Segment code tube screen and intuitive display
- ⦿ Controlled by the infrared remote controller
- ⦿ Equipped with master volume control
- ⦿ SIREN short circuit trigger function
- ⦿ MUTE short circuit trigger function
- ⦿ Equipped with power-off memory function

Specifications	
<b>Model</b>	<b>NVS-90320351MA</b>
Rated Power	350W
Frequency Response	Mic: 120Hz-12kHz (±3dB) Line: 80Hz-15kHz (±3dB)
Sensitivity	Mic: 10mV±1mV Line: 350mV±50mV
Total Harmonic Distortion	<1%
Speaker Output	100V, 4-16Ω
Tone Adjustments	Treble: 10dB (±2) Bass: 10dB (±2)
Power Supply	AC110-AC115V or AC220-230V 50/60Hz
Weight	6.1kg
Dimension	430×380×88mm


# Digital Mixer Amplifier with Multimedia Player 350W

## FRONT PANEL

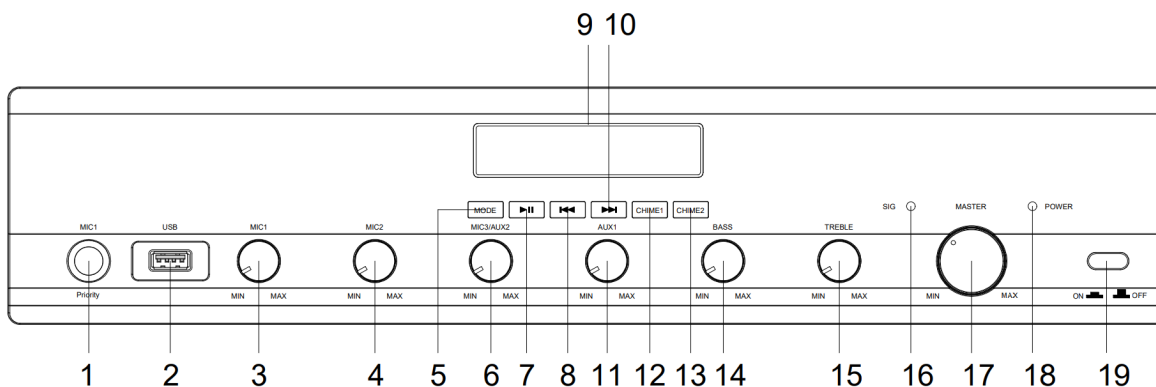

- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. MIC1 IN</li> <li>2. USB Port</li> <li>3. MIC1 Volume Control</li> <li>4. MIC2 Volume Control</li> <li>5. Mode Button</li> <li>6. MIC3/AUX2 Volume Control</li> <li>7. Play/Pause Button</li> <li>8. Previous Song</li> <li>9. Display Screen</li> <li>10. Next Song</li> </ol> | <ol style="list-style-type: none"> <li>11. AUX1 Volume Control</li> <li>12. Chime 1 Button</li> <li>13. Chime 2 Button</li> <li>14. BASS Volume Control</li> <li>15. TREBLE Volume Control</li> <li>16. LEVEL LED</li> <li>17. MASTER Volume Control</li> <li>18. POWER LED</li> <li>19. POWER</li> </ol> |
|--|---|

## REAR PANEL

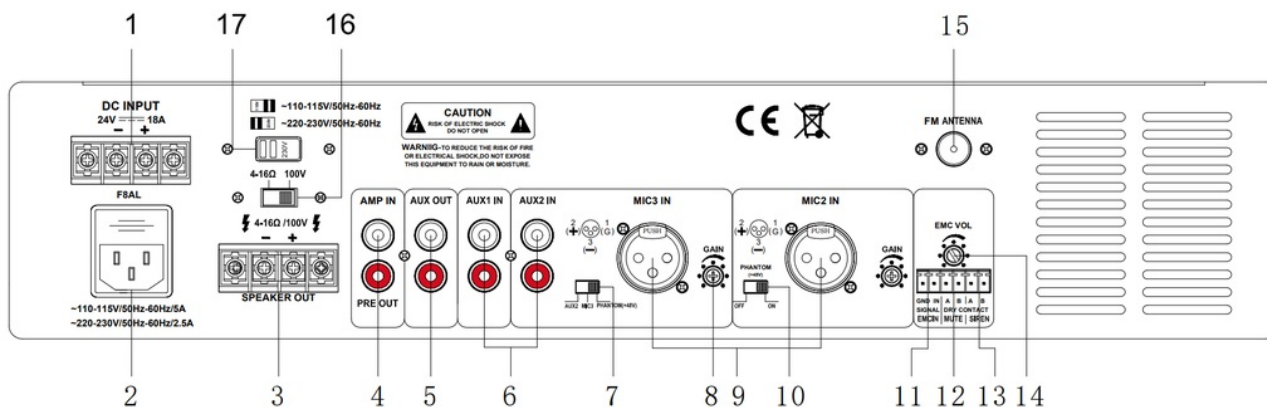

- |   |   |
|---|---|
| <ol style="list-style-type: none"> <li>1. DC +24 Power IN</li> <li>2. Power IN Socket</li> <li>3. Constant Resistance and constant voltage output end</li> <li>4. Extended Preamplifier Interface</li> <li>5. AUX OUT</li> <li>6. AUX1 IN and AUX2 IN</li> <li>7. Audio Source Selection Switch</li> <li>8. MIC Gain Control</li> <li>9. MIC2 and MIC3 Balanced IN</li> </ol> | <ol style="list-style-type: none"> <li>10. Phantom Power Switch</li> <li>11. EMC Trigger IN</li> <li>12. MUTE Short Circuit Trigger</li> <li>13. SIREN Short Circuit Trigger</li> <li>14. Alarm Gain Control</li> <li>15. FM Antenna</li> <li>16. Constant resistance &amp; constant voltage switch</li> <li>17. AC Power Switch</li> </ol> |
|---|---|

# Digital Mixer Amplifier with Multimedia Player 350W

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90320351MA	Digital Mixer Amplifier with Multimedia Player 350W	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
FM Antenna	01
Remote Controller	01
Power Cord	01
6P Green Plug with Lock	01
2-pin RCA SC Cap	01
Handle	02
Plastic Washer	04
Cross Recessed Countersunk Head Screw Black /3x8	04
Cross Recessed Raised Countersunk Head Screw Black /5x19	04
User Manual	01
Warranty Card	01
Certificate	01