

**NVS-90040251MA**

## 5 Input Mixer Amplifier 250W



### DESCRIPTION

The NVS-90040251MA economy mixer amplifier is rated at 250W. It has two aux inputs and three microphone inputs, with Mic 1 having a priority and mute function. There are bass, treble, and master volume control provided. Thermal, short-circuit, and overload protection are all included in complete protection. This amplifier can be used in a variety of contexts, including the grocery store, the classroom and so on.

### FEATURES

- ⊕ Individual volume control for each microphone and line input
- ⊕ Bass and treble control
- ⊕ 3 microphone inputs, Mic 1 with priority and muting function
- ⊕ 2 aux line input & 1 line output for additional mixer or amplifier link
- ⊕ 70V, 100V & 4-16  $\Omega$ , rated power 250W


### Specifications

Model	NVS-90040251MA
Rated Power	250W
Frequency response	50Hz -16kHz ( $\pm 3$ dB)
Input sensitivity	Mic : 600 $\Omega$ , $\leq 3$ mV Line: 10k $\Omega$ , $\leq 300$ mV
Total Harmonic Distortion	< 1% (1kHz, 1/3 rated output voltage)
Signal to Noise Ratio	Mic: >75dB Line: > 80dB
Speaker Output	70V, 100V & 4-16 $\Omega$
Power Supply	AC 220V-240V/50Hz-60Hz
Power consumption	500W
Weight	8.5kg
Dimension	420×338×88mm

**NVS-90040251MA**

# 5 Input Mixer Amplifier 250W


## FRONT PANEL

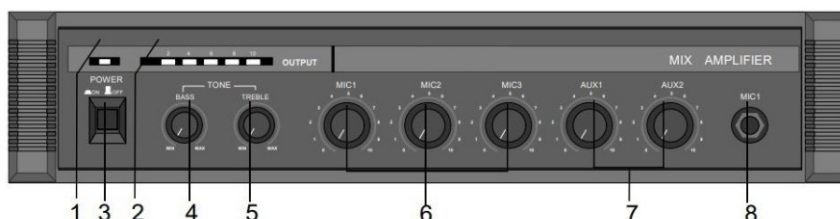

1. LED power indicator
2. LED level meter
3. Power switch
4. Bass control
5. Treble control
6. Mic volume control
7. AUX volume control
8. Mic1 input jack

Note: When all the elements of the LED level meter remain lit, it indicates that the sound is distorted. In such a case, adjust each volume controlling button, until LED element 4(+8dB) and LED element 5(+10dB) shall flash.

## REAR PANEL

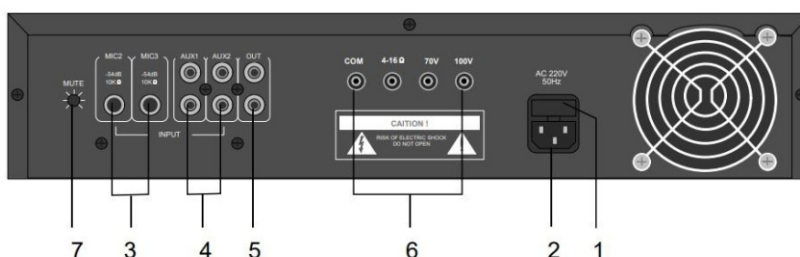

1. AC fuse
2. AC power connector
3. Mic2 input & Mic3 input
4. AUX1 input & AUX2 input
5. AUX output
6. Output terminals
7. Mute control

Note: When connecting to speakers, use one pair of speaker output terminals only.

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90040251MA	5 Input Mixer Amplifier 250W	01