

NVS-90050351MA

5 Input Mixer Amplifier 350W



Mixer Amplifier

DESCRIPTION

The NVS-90050351MA economy mixer amplifier is rated at 350W. It has two aux inputs and three microphone inputs, with Mic 1 having a priority and mute function. There are bass, treble, and master volume control provided. Thermal, short-circuit, and overload protection are all included in complete protection. This amplifier can be used in a variety of contexts, including the grocery store, the classroom and so on.

FEATURES


- ⦿ Individual volume control for each microphone and line input
- ⦿ Bass and treble control
- ⦿ 3 microphone inputs, Mic 1 with priority and muting function
- ⦿ 2 aux line input & 1 line output for additional mixer or amplifier link
- ⦿ 70V, 100V & 4-16 Ω , rated power 350W

Specifications	
Model	NVS-90050351MA
Rated Power	350W
Frequency response	50Hz -16kHz (± 3 dB)
Input sensitivity	Mic : 600 Ω , ≤ 3 mV Line: 10k Ω , ≤ 300 mV
Total Harmonic Distortion	< 1% (1kHz, 1/3 rated output voltage)
Signal to Noise Ratio	Mic: >75dB Line: > 80dB
Speaker Output	70V, 100V & 4-16 Ω
Power Supply	AC 220V-240V/50Hz-60Hz
Power consumption	650W
Weight	13.4kg
Dimension	420x338x88mm

NVS-90050351MA

5 Input Mixer Amplifier 350W


FRONT PANEL

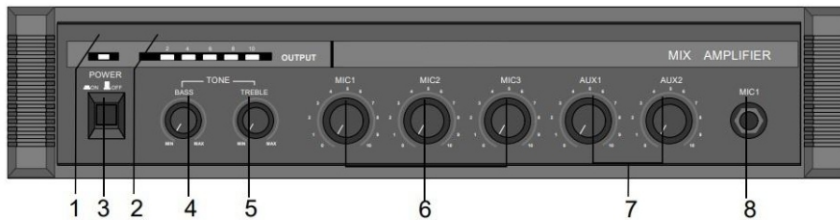

- 1. LED power indicator
- 2. LED level meter
- 3. Power switch
- 4. Bass control
- 5. Treble control
- 6. Mic volume control
- 7. AUX volume control
- 8. Mic1 input jack

Note: When all the elements of the LED level meter remain lit, it indicates that the sound is distorted. In such a case, adjust each volume controlling button, until LED element 4(+8dB) and LED element 5(+10dB) shall flash.

REAR PANEL

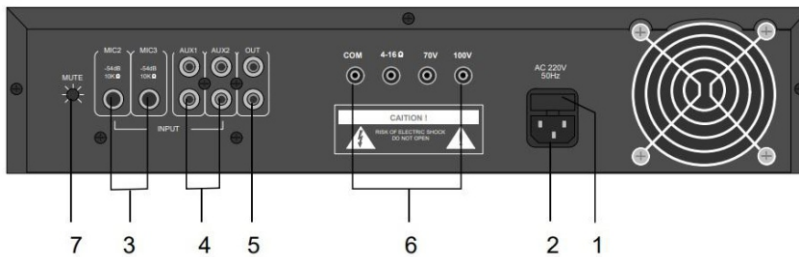

- 1. AC fuse
- 2. AC power connector
- 3. Mic2 input & Mic3 input
- 4. AUX1 input & AUX2 input
- 5. AUX output
- 6. Output terminals
- 7. Mute control

Note: When connecting to speakers, use one pair of speaker output terminals only.

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90050351MA	5 Input Mixer Amplifier 350W	01