

# 10 Input Mixer Amplifier with Equalizer 350W



Mixer Amplifier

## DESCRIPTION

The NVS-90190351MA is a 10 input Mixer Amplifier with Equalizer and have rated voltage outputs of 100V, 70V, and rated resistance outputs of 4-16Ω. It provide 4 audio source input ports, 6 microphone input ports, a line output port and 4 power amplifier's output terminals. 4 audio source channels can be selected automatically. The loudness of each of the six microphones can be adjusted separately. The total output volume is controlled by a master-volume control. The output can be adjusted using the 7-band equalizers (EQ). The goods offer multiple protection, well-defined functions, and a steady working condition, and can meet the sound amplification and background music needs of a conference site.

## FEATURES

- ⦿ 4 audio source channels can be selected automatically
- ⦿ 7-band equalizer and with convenient adjustment function.
- ⦿ Each of the six microphones' volume can be changed independently.
- ⦿ Contains 4 line inputs, 1 line output, 6 microphone inputs
- ⦿ Provide microphone frequency shift function.


Specifications	
<b>Model</b>	<b>NVS-90190351MA</b>
Rated Power	350W
Input Sensitivity	MIC : 2.5mV(±0.5mV) Line: 120mV(±50mV)
Frequency Response	50Hz-20kHz (±3dB)
Total Harmonic Distortion	<1% (1kHz, 1/3 rated output voltage)
Signal to Noise Ratio	Line: ≥70dB
7-band equalizer	64Hz: ±12dB(±2dB) 160Hz: ±12dB(±2dB) 400Hz: ±12dB(±2dB) 1kHz: ±12dB(±2dB) 2.5kHz: ±12dB(±2dB) 6.4kHz: ±12dB(±2dB) 15kHz: ±12dB(±2dB)
Protection function	DC, overload, short-circuit
Phantom power	DC24V
Power Supply	AC220-240V/50-60Hz
Power consumption	650W
Weight	16kg
Dimension(L×W×H)	430×368×88mm

NVS-90190351MA




# 10 Input Mixer Amplifier with Equalizer 350W

## FRONT PANEL

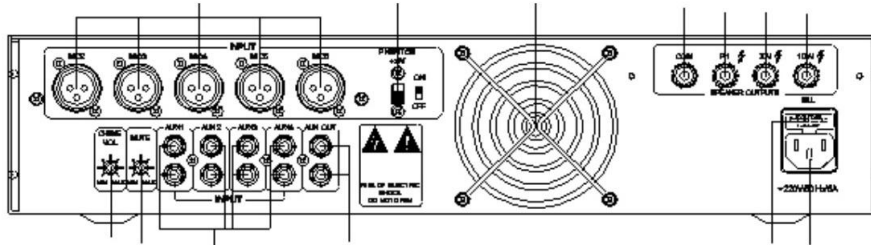

## REAR PANEL

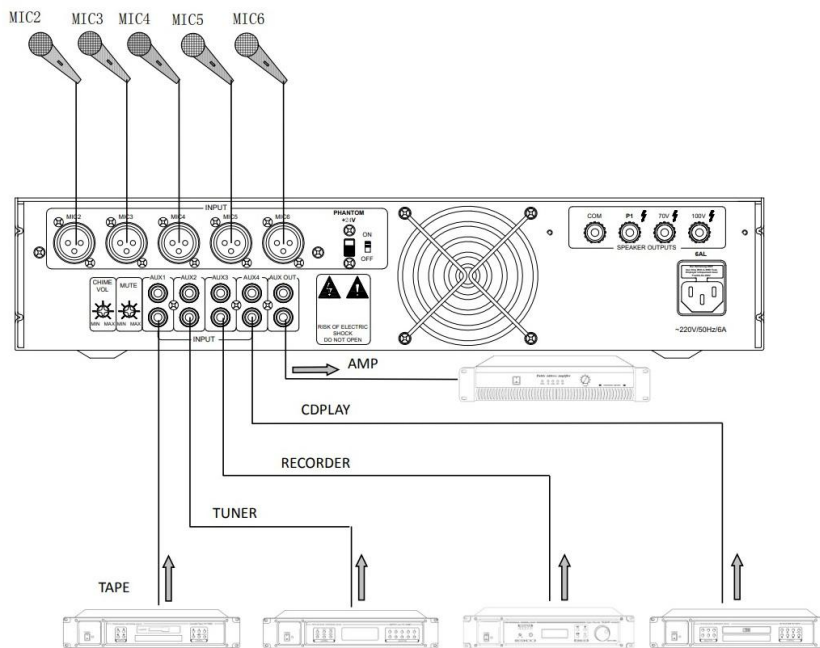

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90190351MA	10 Input Mixer Amplifier with Equalizer 350W	01