

NVS-90200061MA

60W Mixer Amplifier with 5 Inputs



DESCRIPTION

The NVS-90200061MA mixer amplifier is rated at 60W and it has 3 Microphone inputs and 2 AUX inputs. Mic 1 is provided with priority and muting function. Bass and treble controls and master volume control are provided. Complete protection includes short circuit and thermal protection, current limiter and overloading. This amplifier can be applied to different cases, such as classroom, supermarkets and retail shops etc.

FEATURES

- ⦿ Elegant and Strong built quality
- ⦿ Ideal for Classrooms, Supermarkets and retail shops and so on
- ⦿ 2U 19" Rack mountable Design
- ⦿ 70V, 100V & 4-16 Ω , Rated power 60W


Specifications

Model	NVS-90200061MA
Rated Power	60W
Number of Channels	Single Channel
Frequency Response	50Hz -16kHz (± 3 dB)
Input Sensitivity	Mic: 600 Ω , ≤ 3 mV Line: 10k Ω , ≤ 300 mV
Total Harmonic Distortion	< 1% (1kHz , 1/3 rated output voltage)
Signal to Noise Ratio	Mic: >75dB Line: >80dB
Rated Output Voltage/Impedance	70V, 100V / 4-16 Ω
Protection	AC fuse, DC voltage, Overload, Short-circuit
Power Supply	AC 220V-240V/50Hz-60Hz
Power Consumption	120W
Weight	8.5kg
Dimensions(L×W×H)	420×338×88mm

NVS-90200061MA

60W Mixer Amplifier with 5 Inputs


FRONT PANEL

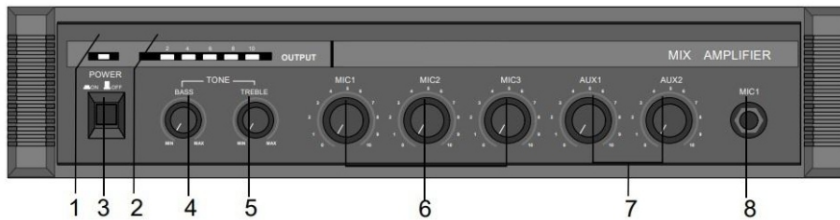

- 1. LED power indicator
- 2. LED level meter
- 3. Power switch
- 4. Bass control
- 5. Treble control
- 6. Mic volume control
- 7. AUX volume control
- 8. Mic1 input jack

Note: When all the elements of the LED level meter remain lit, it indicates that the sound is distorted. In such a case, adjust each volume controlling button, until LED element 4(+8dB) and LED element 5(+10dB) shall flash.

REAR PANEL

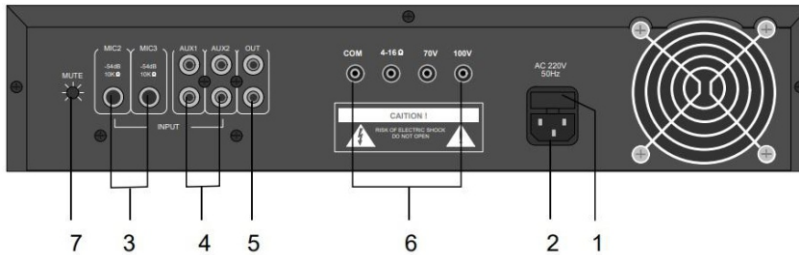

- 1. AC fuse
- 2. AC power connector
- 3. Mic2 input & Mic3 input
- 4. AUX1 input & AUX2 input
- 5. AUX output
- 6. Output terminals
- 7. Mute control

Note: When connecting to speakers, use one pair of speaker output terminals only.

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90200061MA	60W Mixer Amplifier with 5 Inputs	01