

Digital Mixer Amplifier with Multimedia Player 650W



DESCRIPTION

The NVS-90340651MA is a multi-functional Mixer Amplifier incorporated with the functions of USB flash disk, FM and Bluetooth. It support 100V constant voltage output and 4-16 Ω constant resistance speaker output. It is equipped with 3 Mic, 2 AUX, 2 EMC for audio input and with SIREN short circuit trigger function, which can be remotely controlled by this machine or controlled by other devices, with independent alarm output. It is an ideal choice for class rooms, factories and restaurants.


FEATURES

- ⊙ User-friendly and easy to use
- ⊙ Built-in Bluetooth, FM and USB function
- ⊙ Segment code tube screen and intuitive display
- ⊙ Controlled by the infrared remote controller
- ⊙ Equipped with master volume control
- ⊙ SIREN short circuit trigger function
- ⊙ MUTE short circuit trigger function
- ⊙ Equipped with power-off memory function

Specifications	
Model	NVS-90340651MA
Rated Power	650W
Frequency Response	Mic: 20Hz-12kHz (± 3 dB) Line: 80Hz-15kHz (± 3 dB)
Sensitivity	Mic: 10mV ± 1 mV Line: 350mV ± 50 mV
Total Harmonic Distortion	<1%
Speaker Output	100V, 4-16 Ω
Tone Adjustments	Treble: 10dB (± 2) Bass: 10dB (± 2)
Power Supply	AC115V or 230V 50/60Hz
Weight	7 kg
Dimension	430 \times 380 \times 88mm


Digital Mixer Amplifier with Multimedia Player 650W

FRONT PANEL

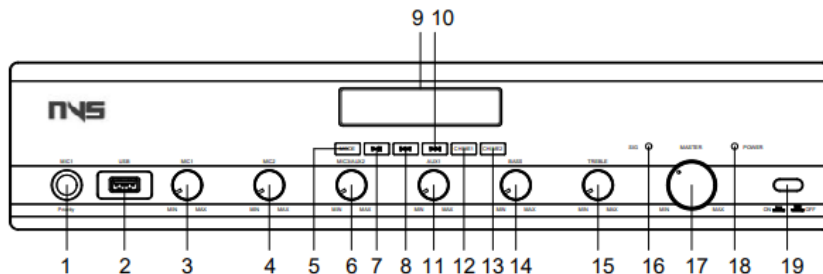

- 1. MIC1 IN
- 2. USB Port
- 3. MIC1 Volume Control
- 4. MIC2 Volume Control
- 5. Mode Button
- 6. MIC3/AUX2 Volume Control
- 7. Play/Pause Button
- 8. Previous Song / (Previous Radio in FM)
- 9. Display Screen
- 10. Next Song / (Next Radio in FM)
- 11. AUX1 Volume Control
- 12. Chime 1 Button
- 13. Chime 2 Button
- 14. BASS Volume Control
- 15. TREBLE Volume Control
- 16. LEVEL LED
- 17. MASTER Volume Control
- 18. POWER LED
- 19. POWER

REAR PANEL

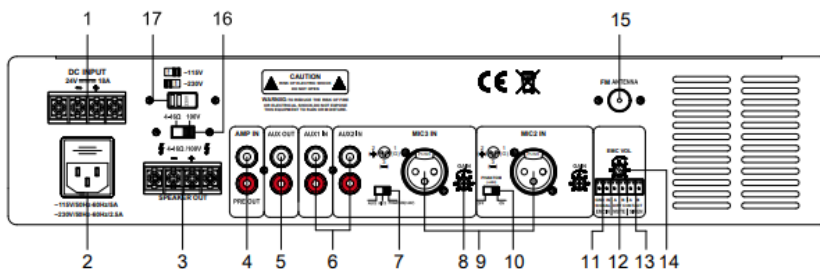

- 1. DC+24V Power IN (EMC Power IN, can only output 60W)
- 2. Power IN AC110-240V
- 3. Constant Resistance and Constant Voltage Output End
- 4. Extended Preamplifier Interface
- 5. AUX OUT
- 6. AUX1 IN and AUX2 IN
- 7. Audio Source Selection Switch
- 8. MIC Gain Control
- 9. MIC2 and MIC3 Balanced IN
- 10. Phantom Power Switch
- 11. EMC Trigger IN
- 12. MUTE Short Circuit Trigger
- 13. SIREN Short Circuit Trigger
- 14. Alarm Gain Control
- 15. FM Antenna
- 16. Constant-resistance and Constant-voltage Switch(Can switch to 4-16Ω or 100V)
- 17. AC Power Switch (Can switch voltage)

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90340651MA	Digital Mixer Amplifier with Multimedia Player 650W	01