


SAFENOR LED EMERGENCY LIGHT ABS HOUSING

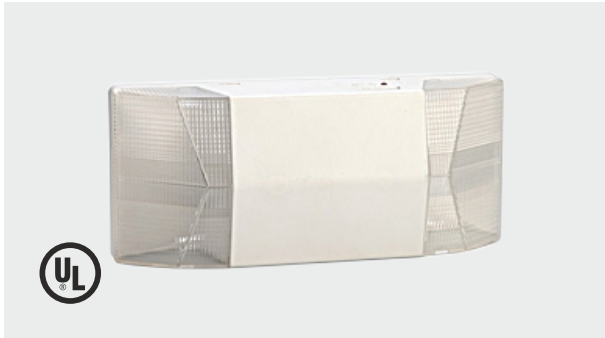

UL No: E505626

FEATURES

- Injection-molded thermoplastic housing.
- UL 94V-0 flame rating.
- Innovative, snap-together design allows for fast and easy installation.
- Two flush mounted Fresnel lenses maximize light output and provides glare-free light distribution.
- Suitable for use in 10°C-40°C ambient temperature
- Suitable for damp location
- Wall or Ceiling mounting.
- Top and side knockout for conduit applications

TECHNICAL PARAMETERS

Characteristic	Value
Operating Voltage	220-240V
Charging time	24 hours
Emergency duration time	3 Hours
Light source	LED
LUX	10.8
Battery	3.6V900mA Ni-MH
Working temperature	-10°C to 40°C
Working humidity	≤90% RH

ORDERING INFORMATION

Part Number	Description
NFE-5006LED	Safenor LED Emergency Light ABS Housing

PACKING INFORMATION

Part Number	Packing Qty.	Packing Mode	Dimension (mm)
NFE-5006LED	6x1	Carton Box	325x260x300

