

2 Zones mixer amplifier with remote paging 350W



DESCRIPTION

The NVS-PA0026002CP is a two-zone mixer amplifier equipped with USB flash disc, radio, Bluetooth, zones, and remote paging capabilities. With numerous features, such as configurable input priority, EMC input, Mic input with phantom power, and clear screen status display. The process is very simple and user-friendly. The product can be used broadly and can fulfil user requirements.


FEATURES

- ⦿ Built-in 4 Mic and 2 AUX and USB/FM/Bluetooth
- ⦿ Support 2 remote paging stations
- ⦿ Individual volume control for Mic 1-4 and Line 1-2
- ⦿ Mic 2-4 with phantom power 48V and gain control
- ⦿ Equipped with chime/Siren/Mute inputs with gain control
- ⦿ Priority: EMC/MIC1/Remote Microphone/Short Circuit adjustable
- ⦿ Built-in two zones of 100V output
- ⦿ 70V/100V & 4-16Ω speaker output

Specifications	
Model	NVS-PA0026002CP
Rated Output Power	350W
Frequency Response	60Hz-16kHz
Input Sensitivity	MIC1 IN: 15±3mV(Unbalanced 6.35 IN) MIC2-MIC4 IN: 10±2mV (Balanced XLR IN) AUX IN: 350mV±50mV(Balanced RCA IN) EMC IN: 600mV±50mV(Unbalanced European terminal)
Total Harmonic Distortion	≤1%
SNR	≥75dB
Tone Adjustment	Bass: 100Hz±10dB Treble: 10KHz±10dB
Phantom Power	+24V
Weight	12.7kg
Dimension	420×403×88mm


2 Zones mixer amplifier with remote paging 350W

FRONT PANEL

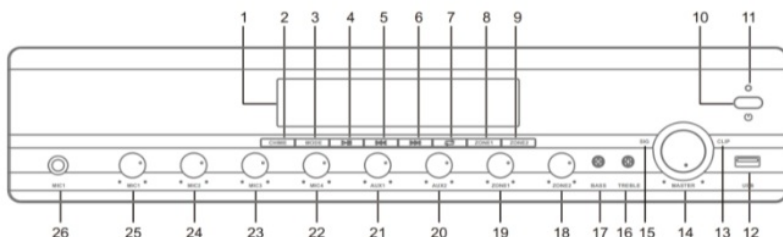

- | | |
|----------------------------|------------------|
| 1. Display Screen | 14. Master VOL. |
| 2. Chime | 15. SIGNAL LED |
| 3. Mode Selection | 16. TREBLE |
| 4. Play/Pause | 17. BASS |
| 5. Last/VOL.- (Long press) | 18. ZONE2 VOL. |
| 6. Next/VOL.+ (Long press) | 19. ZONE1 VOL. |
| 7. Loop | 20. AUX2 IN VOL. |
| 8. ZONE1 | 21. AUX1 IN VOL. |
| 9. ZONE2 | 22. MIC4 VOL. |
| 10. POWER | 23. MIC3 VOL. |
| 11. POWER LED | 24. MIC2 VOL. |
| 12. USB | 25. MIC1 VOL. |
| 13. CLIP LED | 26. MIC1 IN |

REAR PANEL

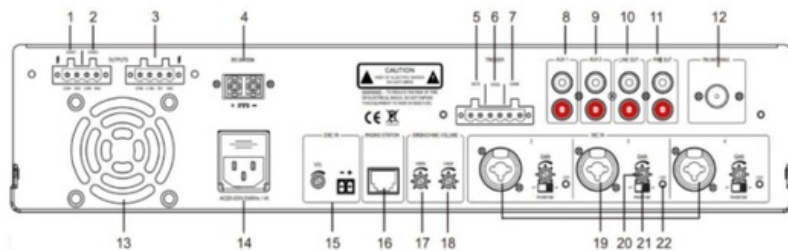

- | | |
|--------------------------------------|-----------------------|
| 1. ZONE1 OUT | 12. FM Antenna |
| 2. ZONE2 OUT | 13. FAN Outlet |
| 3. Constant Resistance & Voltage OUT | 14. AC Power |
| 4. 24V IN | 15. EMC IN & VOL. |
| 5. MUTE Trigger | 16. Paging MIC |
| 6. SIREN Trigger | 17. SIREN VOL. |
| 7. CHIME Trigger | 18. CHIME VOL. |
| 8. AUX1 IN | 19. MIC2, 3, 4 XLR |
| 9. AUX2 IN | 20. MIC GAIN |
| 10. LINE OUT | 21. Phantom Power |
| 11. Extend Preamplifier | 22. Phantom Power LED |

2 Zones mixer amplifier with remote paging 350W

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0026002CP	2 Zones mixer amplifier with remote paging 350W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
2P Green Plug	01
4P Green Plug with Lock	02
6P Green Plug with Lock	01
2-pin RCA Short-circuit Cap	01
SY542 Cable/1500MM/Audio Cable	01
Panel Handle	02
Power Cord	01
5x19 Cross Recessed Raised Countersunk Head Screw Black	04
3x8 Cross Recessed Countersunk Head Screw Black	04
Plastic Washer	04
FM Antenna	01
Remote Controller	01
Certificate	01
Warranty Card	01
User Manual	01