
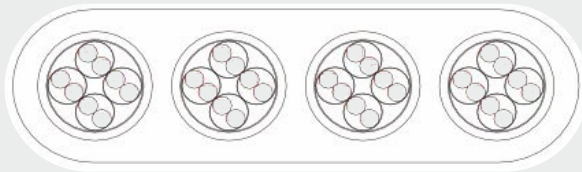


FLAT ELEVATOR CABLE

Norden flat elevator cable is ideal for internal. The elevator traveling Cat 6A cable exceeds Category 6A/Class EA specs. maximum channel length is 60m.

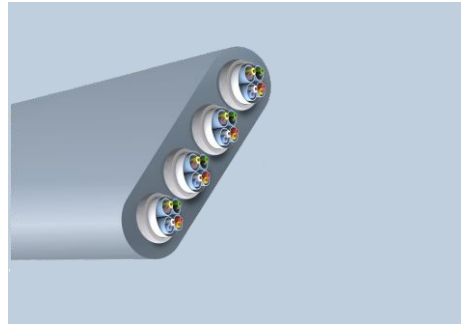

COMPLIANCE

EN 50214
Flame Propagation - IEC/EN 60332-1-2

PRODUCT CLASSIFICATION

| | |
|------------------|--------------------|
| Product Sequence | Premium |
| Product Type | Twisted Pair Cable |

MATERIAL CONSTRUCTION & DESIGN

| | |
|-------------------------|--|
| Conductor Material | Bare Copper |
| Conductor Size | 7/0.16mm, 26 AWG |
| Conductor Construction | Stranded |
| Insulation Material | Foam PE |
| Individual Pair Shield: | Al/PETP foil |
| Support members: | None |
| Overall Shield: | 65% TC braid shield |
| Outer Jacket: | PVC/LSZH |
| Overall Dimension | 29.6 x 8.4 mm |
| Total weight | 340 kg/km |
| Colour Code: | White/blue, red/orange, black/green, yellow/brown (4x) |
| Total Number of pairs | 16 |
| Outer Jacket Color | Grey |

ELECTRICAL & MECHANICAL CHARACTERISTICS

| | |
|------------------------|----------------|
| Free Suspension length | 48 meters max. |
| Travel speed | 4 m/s max. |
| Operating Temp. | -15°C to +75°C |
| Copper Content | 72kg/km |
| Rated Voltage | 100V |

ORDERING INFORMATION

| Part Number | Description |
|---------------|---|
| 104-10011516X | Category 6A S/FTP 16 Pair 26 AWG Flat Elevator Cable PVC |
| 104-10012516X | Category 6A S/FTP 16 Pair 26 AWG Flat Elevator Cable LSZH |