

NVS-PA0016006CP/NVS-PA0017006CP/NVS-PA0018006CP

# 120/250/350W 6 Zones Integrated Mixer Amplifier with Remote Paging



## DESCRIPTION

NVS-PA0016006CP/NVS-PA0017006CP/NVS-PA0018006CP is a kind of cost-effective professional intelligent address system combining the luxurious and high-grade aluminum-alloy panel with standard and exquisite case with an elegant appearance, and also suitable for household, factory, school, hospital, shop and other commercial application.

The amplification system of this equipment is designed with imported power tube, resulting in the strong power, wide frequency band, low noise, high fidelity and quality at the level of performance. In the equipment, there are six partitions and constant impedance output in order to facilitate the user to access the back-end loudspeaker. With the perfect and reliable overload protection, short-circuit protection, and overheat protection, the safety performance of this equipment is improved. The technical essence of this product is focused on the super adaptability and perfect performance.

## FEATURES

- ◆ 6 zones paging/USB/Bluetooth amplifier
- ◆ Built-in MP3 with USB input and Bluetooth function
- ◆ 6 zones with 100V output, 70V/100V and 4-16 ohms
- ◆ 6 zones output with individual volume control
- ◆ With EMC, TEL input and one touch emergency button
- ◆ Remote paging console for 6 zones


Specifications			
Model	NVS-PA0016006CP	NVS-PA0017006CP	NVS-PA0018006CP
Rated Power	120W	250W	350W
Constant voltage output	70V, 100V		
Constant impedance output	4-16Ω (balanced, not grounded)		
Line input sensitivity	300mV(±50mV), 1kHz/unbalanced;		
Microphone input sensitivity	3.0mV(±0.5mV), 1kHz/unbalanced; 5.5mV(±0.5mV), 1kHz/balanced		
EMC input sensitivity	300mV(±50mV), 1kHz/unbalanced;		
Telephone sound source input sensitivity	300mV(±50mV), 1kHz/unbalanced;		
Frequency response	MIC: 100Hz-18kHz (±3dB); TEL: 100Hz-18kHz (±3dB); LINE: 80Hz-20kHz (±3dB);		
Tune control	±10dB (Bass: 100Hz); ±10dB (Treble: 10KHz);		
Signal to noise ratio	MIC: ≥55dB; TEL: ≥65dB; LINE: ≥75dB;		
Auxiliary line output	0dBV, unbalanced		

## NVS-PA0016006CP/NVS-PA0017006CP/NVS-PA0018006CP


# 120/250/350W 6 Zones Integrated Mixer Amplifier with Remote Paging

Specifications			
Model	NVS-PA0016006CP	NVS-PA0017006CP	NVS-PA0018006CP
Remote microphone input	2000mV, balanced		
Protection function	Overload protection, short-circuit protection, temperature protection		
Total harmonic distortion	≤ 1% (1kHz, normal working condition)		
Output adjustment rate	From full load to no load, ≤3dB		
Power consumption	250W	500W	650W
Dimension of machine (L×W×H mm)	483×413×132		
Dimension of packing (L×W×H mm)	540×510×200		
Net weight	14kg	17kg	19kg
Gross weight	16.5kg	19.5kg	21.5kg

### Front Panel

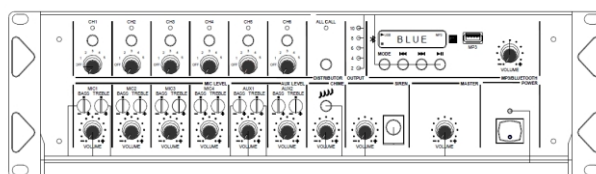

### Rear Panel

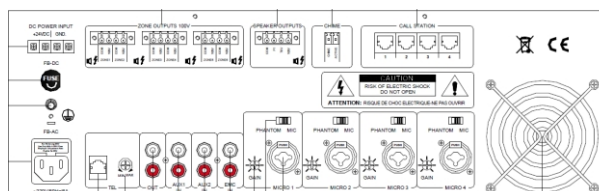

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0016006CP	120W 6 Zones Integrated Mixer Amplifier with Remote Paging	1 No.
NVS-PA0017006CP	250W 6 Zones Integrated Mixer Amplifier with Remote Paging	1 No.
NVS-PA0018006CP	350W 6 Zones Integrated Mixer Amplifier with Remote Paging	1 No.

### PACKING INFORMATION

Part Number	Packing Mode	Gross Weight(kg)	Dimensions(mm)
NVS-PA0016006CP	Carton Box	16.5	540×510×200
NVS-PA0017006CP	Carton Box	19.5	540×510×200
NVS-PA0018006CP	Carton Box	21.5	540×510×200