

4MP TEMPERATURE DETECTION BULLET CAMERA **EYENOR**[®]

ENC-HBU7F-00R-38

FEATURES

Starlight Illumination


4 mm Fixed Visible Lens

ONVIF Profile (S)

Triple Stream

Audio and Alarm Support

PoE, IP67

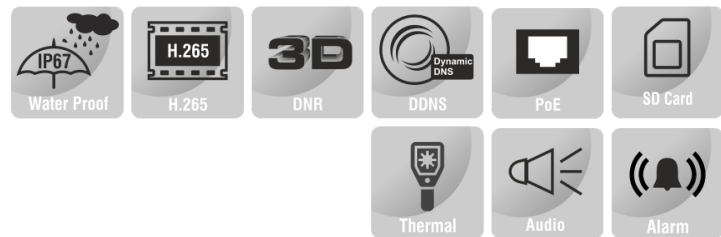

SPECIFICATION

| MODEL | Model No. | ENC-HBU7F-00R-38 |
|------------|-------------------------|--|
| | Type | 4MP TEMPERATURE DETECTION BULLET CAMERA |
| CAMERA | Image Sensor | 1/1.8" CMOS Progressive 4.0 MegaPixel |
| | Day / Night | IR Cut Filter with Auto Switch |
| | Lens Type | Fixed |
| | Focal Length | 4 mm |
| | Iris | Fixed |
| | Lens Mount | M12 |
| | Angle of View (H) | 90° |
| | Angle of View (V) | 49.1° |
| | Angle Adjustment | Bracket; Pan 0~360°, Tilt: 0~75°, Rotate: 0~360° |
| | Aperture Range | F1.0 |
| | Shutter | 1s to 1/100,000s |
| | Min. Illumination | Color: 0.0004 lux @ F1.0 |
| | AGC | Auto / Manual |
| | Digital Noise Reduction | 3D DNR |
| | S/N Ratio | 55 dB |
| | Defog | Smart Defog |
| | WDR | 120 dB |
| Smart IR | N/A | |
| Wavelength | 850 nm | |
| White LEDs | 1 | |

None

★Product specification and availability are subject to change without notice.

4MP TEMPERATURE DETECTION BULLET CAMERA

ENC-HBU7F-00R-38

| MODEL | Model No. | ENC-HBU7F-00R-38 |
|--------------|------------------------|---|
| | Type | 4MP TEMPERATURE DETECTION BULLET CAMERA |
| VIDEO | Max. Resolution | 2560x1440 |
| | Video Compression | H.265+, H.265, H.264, MJPEG |
| | Frame Rate | Main Frame: (2560x1440, 1920x1080, 1280x720, 704x576) @ 25fps Sub Stream: (704x480, 640x360, 352x240) @ 30fps, (704x576, 640x360, 352x288) @ 25fps Third Stream: (1920x1080, 1280x720, 704x480, 704x240, 352x240) @ 30fps, (1920x1080, 1280x720, 704x576, 704x288, 352x288) @ 25fps |
| | Stream Settings | i-Frame, PAL/NTSC, Frame Rate, EIS, SVC |
| | Video Bit Rate | 32 kbps ~ 16 Mbps |
| | Bitrate Type | CBR, VBR |
| | Image Settings | Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night |
| | White Balance | Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual |
| | Corridor Mode | Supported |
| | HLC | Supported |
| | BLC | Supported |
| | OSD | Total 8 regions |
| | OSD Type | Title, Week, Date, Time, Text with different colors and adaptable sizes (16x16, 24x24, 32x32, 48x48, 64x64, 96x96), Image overlay |
| | ROI | Up to 8 regions |
| Privacy Mask | Up to 8 regions | |
| Heatmap | Supported | |
| AUDIO | Audio Compression | G.711A, G.711U, ADPCM_D, AAC_LC |
| | Audio Bit Rate | 8 kbps ~ 48 kbps |
| | Audio I/O | 1/1 |
| | Audio Voltage | Audio cable; Input: Impedance 35 kΩ, Amplitude 2 V [p-p] |
| | Built-in Mic | Supported with noise cancellation |
| INTERFACE | Alarm Management | Motion Detection, Tampering (Masking), Input & Output Event, IP & MAC Address Conflict, Disk Alarm (Full & RW Error), FTP Server Exception, Abnormal Voltage, Pre/Post Alarm Recording, Alarm Recording/Snapshot |
| | Protocols | TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, NFS, DHCP, DNS, DDNS, RTP, RTSP, RTCP, RTMP, PPPoE, NTP, UPnP, SMTP (SSL/TLS), IGMP, 802.1X, QoS (DSCP), Unicast, Multicast, ARP, SNMP, SSL, Telnet, SFTP (SSH), P2P |
| | Compatibility | ONVIF Profile (S), SDK/API/CGI |
| | Network | 1 x RJ45 10M/100M Self Adaptive Ethernet Port |
| | Wi-Fi | N/A |
| | Alarm Interface | 2/1 |
| | Alarm Voltage | Output: Impedance 600 Ω, Amplitude 2 V [p-p] |
| | RS485 | N/A |
| | RS232 | N/A |
| | USB | N/A |
| | Edge Storage | Built-in MicroSD card slot, up to 256 GB |
| | ANR | Supported |
| | Built-in Speaker | Supported |
| | Built-in Heater | N/A |
| | Cable Interface | Pig Tail |
| | Remote Connection | ≤7 |
| Web Client | EyeConnect | |
| Web Language | 16 | |
| GENERAL | Power Supply | 12V DC, PoE (IEEE 802.3af) |
| | Max. Power Consumption | 8 W |
| | Working Temperature | 10 °C ~ 30 °C |
| | Working Humidity | N/A |
| | Ingress Protection | IP67 |
| | Vandal Resistant | N/A |
| | Surge Protection | Supported |
| | Reset Button | Supported |
| Dimensions | 330x114x107 mm | |
| Net Weight | 1.65 kg | |

None


★Product specification and availability are subject to change without notice.

4MP TEMPERATURE DETECTION BULLET CAMERA **EYENOR**[®]

ENC-HBU7F-00R-38

| | | |
|--------------|-----------|---|
| MODEL | Model No. | ENC-HBU7F-00R-38 |
| | Type | 4MP TEMPERATURE DETECTION BULLET CAMERA |

Dimension Unit : mm

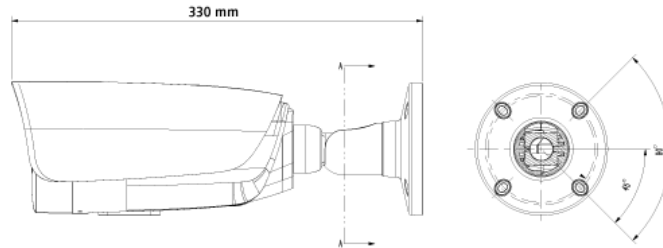

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|------------------|--|-------------------|
| ENC-HBU7F-00R-38 | 4MP IP Dual Sensor Body Temperature Detection Bullet Camera with 4mm Fixed Visible Lens and Thermal Camera with 256x192 Resolution, PoE, Built-in Mic, WDR, Smart Analytics and SD Card Slot Support | 1 |

PACKING INFORMATION

| Part Number | Packing Mode | Gross weight(Kg) | Dimension(mm) |
|------------------|--------------|------------------|---------------|
| ENC-HBU7F-00R-38 | Carton Box | 2 | 355x145x160 |

None

★Product specification and availability are subject to change without notice.