

Digital Mixer Amplifier with Multimedia Player 250W



DESCRIPTION

The NVS-90310251MA is a multi-functional Mixer Amplifier incorporated with the functions of USB flash disk, FM and Bluetooth. It support 70V/100V constant voltage output and 4-16Ω constant resistance speaker output. It is equipped with 3 Mic, 2 AUX, 2 EMC for audio input and with SIREN short circuit trigger function, which can be remotely controlled by this machine or controlled by other devices, with independent alarm output. It is an ideal choice for class rooms, factories and restaurants.

FEATURES

- ⊙ User-friendly and easy to use
- ⊙ Built-in Bluetooth, FM and USB function
- ⊙ Segment code tube screen and intuitive display
- ⊙ Controlled by the infrared remote controller
- ⊙ Equipped with master volume control
- ⊙ SIREN short circuit trigger function
- ⊙ MUTE short circuit trigger function
- ⊙ Equipped with power-off memory function


Specifications	
Model	NVS-90310251MA
Rated Power	250W
Frequency Response	Mic: 20Hz-12kHz (±3dB) Line: 80Hz-15kHz (±3dB)
Sensitivity	Mic:10mV±1mV Line:350mV±50mV
Total Harmonic Distortion	<1%
Speaker Output	70V/100V, 4-16Ω
Tone Adjustments	Treble: 10dB (±2) Bass: 10dB (±2)
Power Supply	AC 110-120V or 200-240V 50/60Hz
Weight	6.8kg
Dimension	430×330×88mm

NVS-90310251MA


NVS®

Digital Mixer Amplifier with Multimedia Player 250W

FRONT PANEL

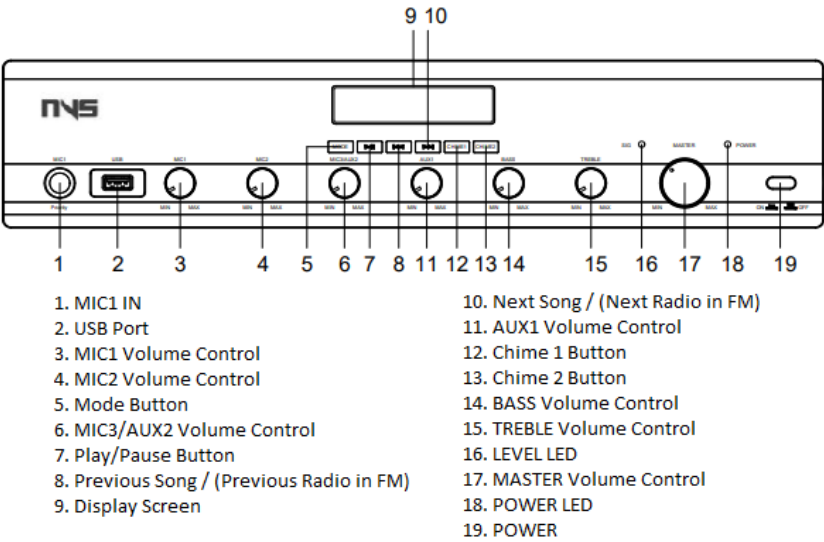

REAR PANEL

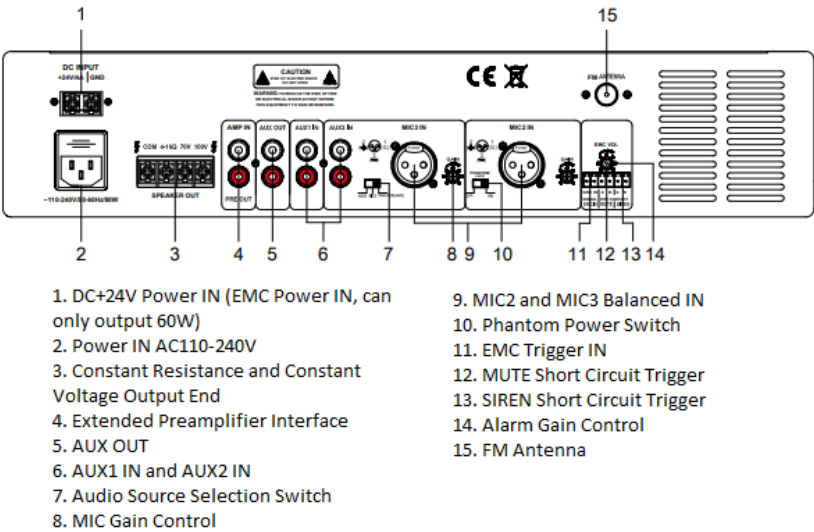

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90310251MA	Digital Mixer Amplifier with Multimedia Player 250W	01