

Wall mount Music Mixer Amplifier with Touch Screen 2x10W



DESCRIPTION

The NVS-90350022MA is a Wall mount music Mixer Amplifier with Touch Screen. It has a touch screen with a 3.5" TFT capacitance display that can show functions clearly and provide accurate control. It has various audio sources, including FM, SD, BT, and AUX. It might come with an infrared remote control so that users can easily control the music. It is mainly suitable for small venues like apartment, office room and retail shops.

FEATURES


- ⦿ 3.5" TFT LCD display, capacitive touch operation
- ⦿ Multiple music connection modes like FM, SD, USB, BLUETOOTH and AUX
- ⦿ Support MP3, VMA, WAV, FLAC
- ⦿ Support adjustable sensitivity of auxiliary input
- ⦿ Support FM radio that can automatically or manually receive channels, and can store 20 channels
- ⦿ Type D differential output
- ⦿ Support RS485 communications.

Specifications

Model	NVS-90350022MA
Rated Power	2x10W
Rated Impedance	8Ω
Frequency response	50Hz-18KHz
Total Harmonic Distortion	≤1% (1KHz, 1W, 8Ω)
Signal to Noise Ratio	>71dB
Sensitivity of auxiliary input	AUX: 1.0V
Audio format	MP3, WMA, WAV, FLAC
Storage Type	SD card, USB
Bluetooth	BT4.1
Control interface	RS485
Power Supply	~110-240V/50/60Hz
Weight	0.2Kg
Dimension	86×86×38mm

Wall mount Music Mixer Amplifier with Touch Screen 2x10W

REAR PANEL

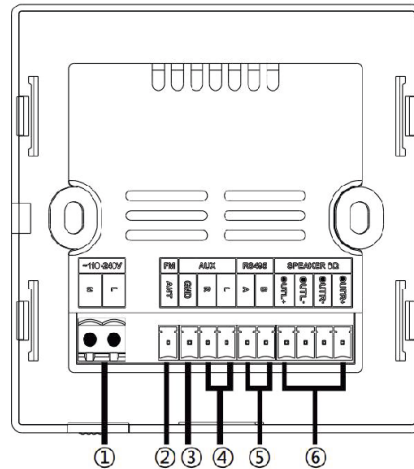

1. Power Input : ~110-240V
 2. FM Antenna
 3. Signal Ground
 4. Audio Input 1 (2x0.3mm² double shielded audio cable)
 5. RS485
 6. Power Amplifier Output (Oxygen-free copper speaker cable)
- Note: All wire connections shall not be naked.

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-90350022MA	Wall mount Music Mixer Amplifier with Touch Screen 2x10W	01