

## Ceiling Speaker with Fire Dome 6W



### DESCRIPTION

The NVS-10440006CS is a Ceiling Speaker with built-in 70V/100V transformer. The transmission takes place in a high-voltage, low-current environment. Low-current mode allows for longer transmission distances and parallel connections of many loudspeakers. The 4.5" built-in speaker driver has a wide frequency response (100-16,000Hz). It is composed of high-quality steel and is fixed in place by stamping, ensuring long-term durability and ensuring that it will never go out of shape. For fireproofing, it comes with a leaded wire case that is difficult to burn. The installation is simple and secure due to the spring clip clamp. It is an ideal choice for industrial and commercial applications such as hotels, schools, offices, and factories where, background music and paging is needed.

### FEATURES

- ⦿ 4.5" paper cone driver unit
- ⦿ Ceiling recessed type loudspeaker
- ⦿ Leaded wire case for fireproofing
- ⦿ Fast installation by spring clip
- ⦿ Made of high-class steel
- ⦿ Built-in 100V/70V transformer

### Specifications



Model	NVS-10440006CS
Rated Power	6W
Driver Size	4.5" X 1
Frequency Response	100Hz-16KHz
Power Taping Options	1.5/3/5/6W
Input Voltage/Impedance	70V/100V
Sensitivity(1m,1w)	91dB
Maximum SPL(1m)	96dB
Weight	1.2Kg
Dimension	Ø168 x 110 mm
Cutout Size	Ø155 - Ø158mm

NVS-10440006CS



# Ceiling Speaker with Fire Dome 6W

## DIMENSION

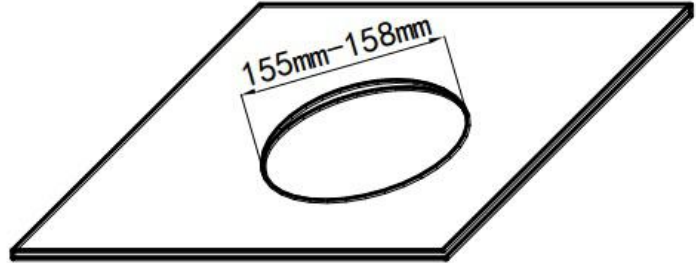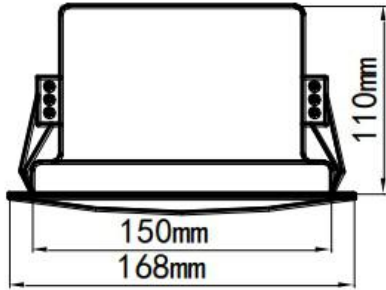

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10440006CS	Ceiling Speaker with Fire Dome 6W	1