

8MP STARLIGHT IR IP H.265 VANDAL PROOF MOTORIZED DOME CAMERA

EYENOR[®]

ENC-HCVAM-40R-15

FEATURES

Starlight Illumination

2.8 ~ 12mm Motorized Lens


Smart IR Up to 40m

IP67,IK10,POE

ONVIF Profile (S/G/T)

Triple Stream

Built in Mic

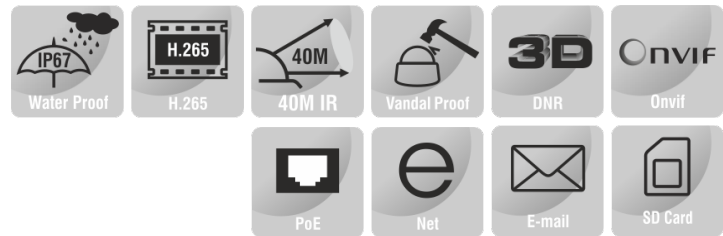

SPECIFICATION

| MODEL | Model No. | ENC-HCVAM-40R-15 |
|------------------|----------------------|--|
| | Type | 8MP Starlight IR IP H.265 Vandal Proof Motorized Dome camera |
| CAMERA | Image Sensor | 1/2.8", 8.0 megapixel, progressive scan, CMOS |
| | Lens | 2.8 ~ 12mm, AF automatic focusing and motorized zoom lens |
| | Angle of View (H) | 107.4°~ 29.2° |
| | Angle of View (V) | 54.2°~ 16.3° |
| | Angle of View (O) | 111.0°~33.1° |
| | Adjustment angle | Pan: 3° ~ 360°, Tilt: 0° ~ 75°, Rotate: 3° ~ 360° |
| | Shutter | Auto/Manual, 1 ~ 1/100000s |
| | Minimum Illumination | Colour: 0.003Lux (F1.6, AGC ON) 0Lux with IR |
| | Day/Night | IR-cut filter with auto switch (ICR) |
| | S/N | >56dB |
| | IR Range | Up to 40m (131ft) IR range |
| | Wavelength | 850nm |
| | IR On/Off Control | Auto/Manual |
| | Defog | Digital Defog |
| WDR | 120dB | |
| Warm Light Range | N/A | |



8MP STARLIGHT IR IP H.265 VANDAL PROOF MOTORIZED DOME CAMERA



ENC-HCVAM-40R-15

| MODEL | Model No. | ENC-HCVAM-40R-15 |
|------------------|-------------------------|---|
| | Type | 8MP Starlight IR IP H.265 Vandal Proof Motorized Dome camera |
| VIDEO | Video Compression | H.265+, H.265, H.264, MJPEG |
| | H.264 code profile | Baseline profile, Main profile |
| | Frame Rate | Main Stream: 8MP (3840*2160), Max 20fps; 5MP (3072*1728), Max 30fps; 4MP (2560*1440), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; Third Stream: D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; |
| | Video Bit Rate | 128 Kbps~16 Mbps |
| | 9:16 Corridor Mode | N/A |
| | OSD | Up to 8 OSDs |
| | Privacy Mask | Up to 4 areas |
| | ROI | Up to 8 areas |
| | White Balance | Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2 |
| | Digital noise reduction | 2D/3D DNR |
| | Smart IR | Supported |
| | Flip | Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise |
| | Dewarping | Supported |
| | HLC | Supported |
| | BLC | Supported |
| Motion Detection | Up to 4 areas | |
| AUDIO | Audio Compression | G.711 |
| | Two-way Audio | N/A |
| | Audio In | N/A |
| | Audio Out | N/A |
| | Suppression | Supported |
| | Sampling Rate | 8KHZ |
| | Built-in Mic | Supported |
| SMART | Alarm Trigger | Cross line, intrusion, enter area, leave area detection, Motion detection, tampering alarm, audio detection |
| | General Function | Watermark, IP address filtering, tampering alarm, alarm input, alarm output, access policy, ARP protection, RTSP Authentication, user authentication |
| INTERFACE | Protocols | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS |
| | Compatibility | ONVIF (Profile S, Profile G, Profile T), API |
| | Network | 10/100M Base-TX Ethernet |
| | Alarm I/O | N/A |
| | Web Browser | Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+ |
| | Edge Storage | Micro SD, up to 256 GB |
| | Network Storage | ANR |
| | Built-in Speaker | N/A |
| | Alarm Light | N/A |
| GENERAL | Power Supply | DC 12V±25%, PoE (IEEE 802.3af) |
| | Power Consumption | Max 9.0W |
| | Dimensions (Ø x H) | Φ129 x 110mm (Ø5.1" x 4.3") |
| | Weight | 0.69kg (1.52lb) |
| | Material | Metal |
| | Working Environment | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing) |
| | Storage Environment | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing) |
| | Surge Protection | 6KV |
| | Ingress Protection | IP67 |
| | Vandal Resistant | IK10 |
| Reset Button | Supported | |




8MP STARLIGHT IR IP H.265 VANDAL PROOF MOTORIZED DOME CAMERA



ENC-HCVAM-40R-15

| | | |
|-------|-----------|--|
| MODEL | Model No. | ENC-HCVAM-40R-15 |
| | Type | 8MP Starlight IR IP H.265 Vandal Proof Motorized Dome camera |

Dimension Unit : mm

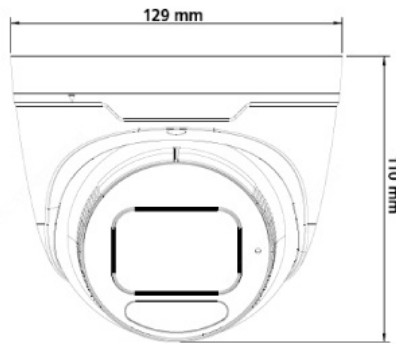

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|------------------|--|-------------------|
| ENC-HCVAM-40R-15 | 8MP IR IP H.265 Compact Dome camera with 2.8 to 12mm Motorised Lens, POE, SD card slot, WDR, Built 1 in Mic, Smart Analytics* and 40M IR support | |

PACKING INFORMATION

| Part Number | Packing Mode | Gross weight(Kg) | Dimension(mm) |
|------------------|--------------|------------------|-----------------------------|
| ENC-HCVAM-40R-15 | Carton Box | 0.69kg (1.52lb) | Φ129 x 110mm (Ø5.1" x 4.3") |

