


# 110 WIRING BLOCK

The wall mount wiring block is available with or without legs. Cable access openings allow cables to be routed through wiring blocks directly to point of termination. The speedy punch down on the block base ensure to reduce the installation time and cost.

The termination of cable on 110 wiring blocks is achieved with the use of 110 tools. The blocks are available in 50 pair and 100 with or without legs.

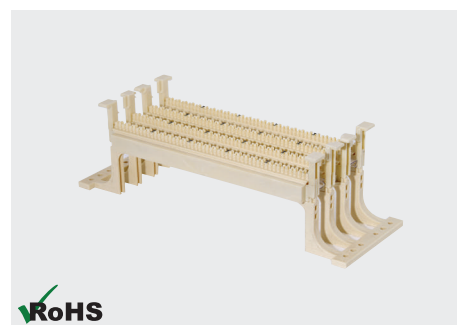

## SPECIFICATION

Material of Construction	High Impact, flame retardant PC
Conductor Dia. Solid wire	0.50 to 0.65 mm
Conductor Dia. Stranded wire	7x0.2 to 0.25 mm
Wire Gauge range	22-26 AWG
Insulation Diameter range	0.6 mm to 1.6 mm
Contact resistance	20 mΩ
Insulation resistance	500 MΩ min @ 100 Vdc
Spring contacts	1.25 μm min. Silver plated

## ORDERING INFORMATION

Part Number	Description
231-2050	110 Wiring Block w/out Leg 50 Pair
231-2100	110 Wiring Block w/out Leg 100 Pair
231-1050	110 Wiring Block with Leg 50 Pair
231-1100	110 Wiring Block with Leg 100 Pair

## PACKING INFORMATION

Part Number	Packing Qty.	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
231-2050	40 x 1	Carton Box	8.0	9.0	545 x 260 x 395
231-2100	20 x 1	Carton Box	8.0	9.0	545 x 260 x 395
231-1050	40 x 1	Carton Box	8.0	9.0	545 x 260 x 395
231-1100	20 x 1	Carton Box	8.0	9.0	545 x 260 x 395