

2MP STARLIGHT IR IP H.265 FIXED BULLET CAMERA



ENC-HCB5F-30R-15

FEATURES

- Starlight Illumination
- 2.8/4mm Fixed Lens
- Smart IR Up to 30m (98ft) IR range
- ONVIF Profile (S/G/T)
- Built In Mic & Built In Speaker
- IP67,POE



SPECIFICATION

MODEL		ENC-HCB5F-30R-15
	Model No.	ENC-HCB5F-30R-15
	Type	2MP STARLIGHT IR IP H.265 FIXED BULLET CAMERA
CAMERA	Image Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS
	Lens Type	Fixed
	Focal length	2.8/4mm
	Angle of View (H)	106.7°(2.8mm)/ 87.5°(4mm)
	Angle of View (V)	57.1°(2.8mm)/ 46.3°(4mm)
	Angle of View (O)	115.7°(2.8mm)/ 92.4°(4mm)
	Adjustment angle	Pan: 0° ~ 360°,Tilt: 0° ~ 90°,Rotate: 0° ~ 360°
	Shutter	Auto/Manual, 1 ~ 1/100000s
	Minimum Illumination	Colour: 0.002Lux (F1.6, AGC ON); B/W: 0Lux with IR
	Day/Night	IR-cut filter with auto switch (ICR)
	S/N	>52dB
	IR Range	Up to 30m (98ft) IR range
	Wavelength	850nm
	IR On/Off Control	Auto/Manual
Defog	Digital Defog	
WDR	120dB	



2MP STARLIGHT IR IP H.265 FIXED BULLET CAMERA



ENC-HCB5F-30R-15

MODEL	Model No.	ENC-HCB5F-30R-15
	Type	2MP STARLIGHT IR IP H.265 FIXED BULLET CAMERA
VIDEO	Video Compression	H.265+, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main profile, High profile
	Frame Rate	Main Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps
	Video Bit Rate	128 Kbps~6 Mbps
	OSD	Up to 4 OSDs
	Privacy Mask	Up to 4 areas
	ROI	Up to 8 areas
	Motion Detection	Up to 4 areas
	White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
	Digital noise reduction	2D/3D DNR
	Smart IR	Supported
	Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise
	HLC	Supported
	BLC	Supported
AUDIO	Audio Compression	G.711
	Two-way Audio	Supported
	Suppression	Supported
	Sampling Rate	8KHZ
SMART	Behavior Detection	Intrusion, Crossing line
	Statistical Analysis	Motion detection, Tampering alarm, Audio detection
	General Function	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, user authentication, HTTP authentication
INTERFACE	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, SNMP
	Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
	Client	Eyenor VMS
	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
	Edge Storage	Built in Micro Sd Card Slot upto 128GB support
	Network Storage	ANR, NAS(NFS)
	Network	10/100M Base-TX Ethernet
	Audio I/O	N/A
	Alarm I/O	N/A
	Built-in Mic	Supported
GENERAL	Built-in Speaker	Supported
	Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption	Max 9.0W
	Dimensions (Ø x H)	191×75×74mm (7.5"×2.9"×2.9")
	Weight	0.41kg (0.90lb)
	Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Surge Protection	4KV
	Ingress Protection	IP67
Vandal Resistant	N/A	
Reset Button	Supported	




2MP STARLIGHT IR IP H.265 FIXED BULLET CAMERA



ENC-HCB5F-30R-15

MODEL	Model No.	ENC-HCB5F-30R-15
	Type	2MP STARLIGHT IR IP H.265 FIXED BULLET CAMERA

Dimension Unit : mm

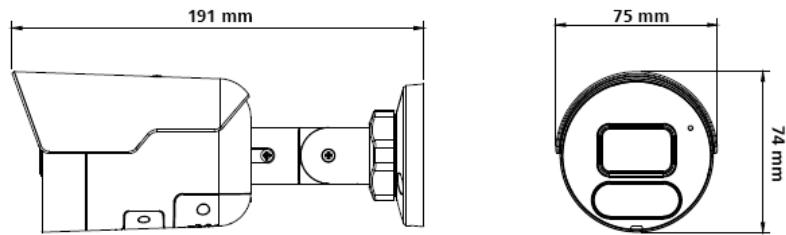

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HCB5F-30R-15	2MP IR IP H.265 Compact Bullet camera with 2.8/4mm Fixed Lens, POE, WDR, Built in Mic, Speaker and 30M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HCB5F-30R-15	Carton Box	0.41kg (0.90lb)	191×75×74mm (7.5"×2.9"×2.9")

