


# 32CH EMBEDDED NETWORK VIDEO RECORDER

**ENR-08032-N-PSK**

## FEATURES

- 32 Channel input
- Support H.265+, H.265, H.264 video formats
- 8 SATA Hot Swappable HDDs Bays
- HDMI and VGA simultaneous output
- Support RAID (0/1/5/6/10)
- eSATA Interface
- ONVIF Profile (S, G, T)
- N+M Hot Standby
- Redundant Power Supply

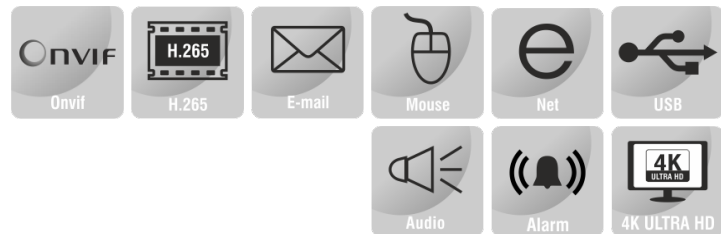

## SPECIFICATION

MODEL		Model No.	ENR-08032-N-PSK
VIDEO & AUDIO		Type	32CH EMBEDDED NETWORK VIDEO RECORDER
VIDEO & AUDIO		Video Input	32-Ch (Upgradable to 40 Channels)
VIDEO & AUDIO		Incoming Bandwidth	320 Mbps
VIDEO & AUDIO		Outgoing Bandwidth	320 Mbps
VIDEO & AUDIO		HDMI/VGA Output	HDMI 1 : 3840x2160, 2560x1600, 2560x1440, 1920x1080, 1440x900, 1366x768, 1280x800, 1280x720, 1024x768, 800x600 HDMI 2/ VGA 2-ch: 1920x1080, 1440x900, 1366x768, 1280x800, 1280x720, 1024x768, 800x600
VIDEO & AUDIO		Audio Input / Output	1-ch Input (3.5mm)/ 2-ch Output (3.5mm & BNC)
VIDEO & AUDIO		Two way Audio	Supported
VIDEO & AUDIO		Screen Split	1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40
VIDEO & AUDIO		Video Encryption	Supported
VIDEO & AUDIO		OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes
DECODING		Video Compression	H.265+, H.265, H.264
DECODING		Video Bit Rate	32kbps ~ 16Mbps (per channel), CBR, VBR
DECODING		Audio Compression	G.711A/G.711U
DECODING		Audio Bit Rate	8 ~ 48 kbps
DECODING		Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
DECODING		Recording Mode	Continuous, Manual, Event (Pre/Post, Motion etc.), Schedule, ANR, Record interval by time/size
DECODING		Pre/Post Record Time	Pre (5~60 sec); Post (10~600 sec)
DECODING		Fisheye Camera	Supported
DECODING		De-warping	Supported

None

★Product specification and availability are subject to change without notice.

# 32CH EMBEDDED NETWORK VIDEO RECORDER

## ENR-08032-N-PSK

<b>MODEL</b>	<b>Model No.</b>	<b>ENR-08032-N-PSK</b>
	<b>Type</b>	32CH EMBEDDED NETWORK VIDEO RECORDER
<b>MONITORING</b>	Preview Capability	2x12MP/4x8MP/4x6MP/5x5MP/8x4MP/9x3MP/16x1080P/32x720P/64x4CIF
	Synchronous Playback	2x12MP/4x8MP/4x6MP/5x5MP/8x4MP/9x3MP/16x1080P/16x720P
	Live View Functions	Screen matrix, Stream type, System alarm, Snapshot, Record, Talkback, Volume adjustment, Full screen, Digital zoom
	Playback Functions	Sync playback, Play, Pause, Stop, Fast play, Slow play, Full Screen, Backup selection, Snapshot, Clip management, Screen matrix, Stream type
	Corridor Mode	Supported
	Backup Mode	USB, Network, e-SATA, SATA burner
	Export Picture Format	JPG, BMP
	Export Video Format	MP4, SDV, AVI
	Download from Edge storage	MP4, SDV, AVI
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, RTCP, RTMP, FTP, NFS, PPPoE, NTP, UPnP, QoS, SMTP, IGMP, Multicast, ARP, SNMP, SSL, Telnet
	Compatibility	ONVIF Profile (S, G, T)
	Network	2xRJ45 (10/100/1000 Mbps) Self Adaptive Ethernet Port
	Serial Interface	1xRS232, 2xRS485
	USB Interface	1xUSB 3.0, 2xUSB 2.0
	Alarm Interface	16 Input & 4 Output
<b>SMART</b>	Alarm Management	Input & Output event, Illegal access, IP Conflict, MAC Conflict, Network Interrupt, Hard disk full, No hard disk, Hard disk R/W error, Hard disk overload, SMART check error, Abnormal recording, Abnormal temperature, Hot spare error & Array error, Motion detection, Tampering (Masking), Smart detection, Video loss
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Analytics	Loitering, Running, Abandoned object (Object Left), Missing object (Object Lost), Parking, Face Detection (Capture), People Counting, Crowd Detection, On Duty Detection, Abnormal Video & Audio Detection, Heatmap, Auto Tracking **Compatible with analytic supported cameras
<b>STORAGE</b>	SATA	8 SATA Interfaces
	Capacity	Up to 10TB for each HDD
	Array Type	JBOD, RAID 0/1/5/6/10, Hot Spare
	eSATA	Supported
	ANR	Supported
<b>GENERAL</b>	Main Processor	Quad Core Embedded Processor
	Operating System	Embedded Linux
	User Permission	32 with multiple privilege level
	Web Client	Eye Connect
	Web Language	14
	Power	AC100 ~ 240V, 50 / 60HZ
	Redundant Power	Supported
	Power Consumption	≤100W (without HDD)
	Working Environment	-10°C ~ 55°C
	Humidity	10% ~ 90%RH
	Chassis	2U
	Dimension	87.6x444x520 mm
Net Weight	7 Kg	

None


★Product specification and availability are subject to change without notice.

# 32CH EMBEDDED NETWORK VIDEO RECORDER **EYENOR**<sup>®</sup>

## ENR-08032-N-PSK

<b>MODEL</b>	Model No.	ENR-08032-N-PSK
	Type	32CH EMBEDDED NETWORK VIDEO RECORDER

Dimension Unit : mm

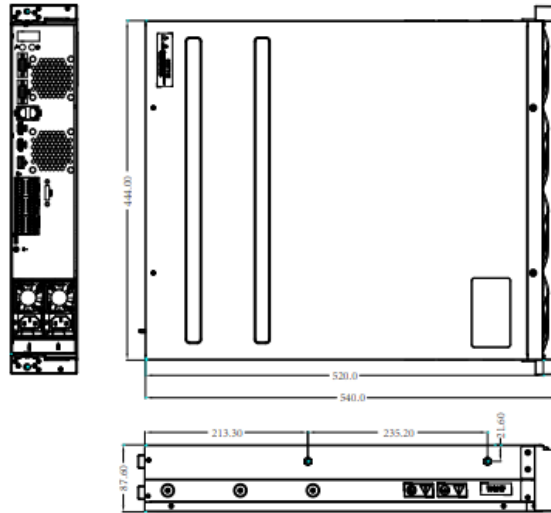

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-08032-N-PSK	32Ch Embedded Network Video Recorder with 8 Hot swappable HDD Bays Supports 4K Cameras, HDMI, VGA, RAID, Smart analytics, Redundant power and ONVIF	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENR-08032-N-PSK	Carton Box	9.5	87.6×444×520

None

★Product specification and availability are subject to change without notice.