

IR IP H.265 VANDAL PROOF COMPACT DOME CAMERA



ENV-HCV5F/7F-30R-17

FEATURES

Day/night functionality
Smart IR, up to 30M IR distance
2D/3D DNR (Digital Noise Reduction)
H.265, H.264, MJPEG
Triple streams
ROI (Region of Interest)
ONVIF Conformance
2-Axis, IK10 vandal resistant
IP66



SPECIFICATION

MODEL	Model No.	ENV-HCV5F-30R-17	ENV-HCV7F-30R-17
CAMERA	Type	2MP IR IP H.265 Vandal Proof Compact Dome Camera	4MP IR IP H.265 Vandal Proof Compact Dome Camera
	Image Sensor	1/2.7" , progressive scan, 2 megapixel, CMOS	1/3" , 4 megapixel, progressive scan CMOS
	Lens	2.8 mm AF (Optional 4mm AF Lens)	
	Angle of View (H)	105.2° (76.6°)	
	Shutter	Auto/Manual, 1/6~1/100000 s	
	Min. Illumination	Colour: 0.2 Lux (F2.2, AGC ON), 0 Lux with IR	
	Day/Night	IR-cut filter with auto switch (ICR)	
	Digital noise reduction	2D/3D DNR	
	S/N	>52dB	
	IR Range	Up to 30m IR range	
	Defog	Digital Defog	
	WDR	DWDR	
	Max. Resolution	1920 x 1080	2592 x 1520
	VIDEO	Video Compression	H.265, H.264, MJPEG
H.264 code profile		Baseline profile, Main Profile, High Profile	
Frame Rate		Main Stream: 2MP (1920×1080): Max. 25 fps; Sub Stream: 720P (1280×720): Max. 25 fps; Third Stream: D1(720×576) : Max. 25fps	4MP (2592×1520): Max.20 fps; 4MP (2560×1440):Max.25 fps 3MP (2048×1520): Max.30 fps; 1080P (1920×1080): Max.30 fps
HLC		Supported	
BLC		Supported	
OSD		Up to 8 OSDs	
Privacy Mask		Up to 4 areas	Up to 8 areas
NETWORK	ROI	Supported	
	Motion Detection	Up to 4 areas	
	General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication	
	Protocols	IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,RTP, RTSP, RTCP, DNS,DDNS,NTP,FTP,UPnP,HTTP, HTTPS,SMTP,SIP,802.1X, PPPoE	
	Compatible Integration	ONVIF,API	



IR IP H.265 VANDAL PROOF COMPACT DOME CAMERA




ENV-HCV5F/7F-30R-17

SPECIFICATION

MODEL	ENV-HCV5F-30R-17	ENV-HCV7F-30R-17
Type	2MP IR IP H.265 Vandal Proof Compact Dome Camera	4MP IR IP H.265 Vandal Proof Compact Dome Camera
Network	10M/100M Base-TX Ethernet	
Power	12 V DC, PoE (IEEE802.3 af) Power consumption: Max 5.0W	
Working Environment	-30°C ~ +60°C, Humidity: 10%~95% RH(non-condensing)	
Vandal Resistant	IK10	
Ingress Protection	IP66	
Dimensions	108.5 x 108.5 x 81mm	
Weight	0.3 kg	

Dimension Unit: mm

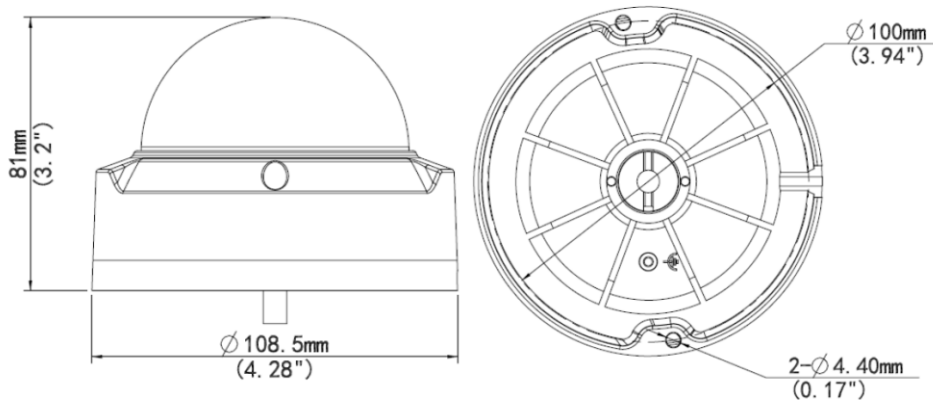

Ordering Information

Part Number	Description	Standard Quantity
ENV-HCV5F-30R-17	2MP IR IP H.265 Vandal Proof Compact Dome camera with 2.8mm (Optional 4mm) Fixed Lens, PoE and 30M IR support	1
ENV-HCV7F-30R-17	4MP IR IP H.265 Vandal Proof compact Dome camera with 2.8mm (Optional 4mm) Fixed Lens, PoE and 30M IR support	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HCV5F-30R-17	Carton Box	0.3	108.5x108.5x81
ENV-HCV7F-30R-17	Carton Box	0.3	108.5x108.5x81