

IR IP H.265 COMPACT BULLET CAMERA



ENV-HCB5F-30R-12/ENV-HCB7F-30R-11


FEATURES

- Day/night functionality
- Smart IR, Up to 30M IR distance
- Optical glass window, IR anti-reflection window
- 2D/3D DNR (Digital Noise Reduction)
- Ultra 265,H.265, H.264, MJPEG
- Embedded smart algorithm
- Triple streams, 9:16 corridor format
- ONVIF Conformance, IP67



UL No: E491809

Field of View



SPECIFICATION

MODEL	Model No.	ENV-HCB5F-30R-12	ENV-HCB7F-30R-11
CAMERA	Type	2MP IR IP H.265 Compact Bullet Camera	4MP IR IP H.265 Compact Bullet Camera
	Image sensor	1/2.7", progressive scan, 2.0megapixel, CMOS	1/3", progressive scan, 4.0megapixel, CMOS
	Lens	4mm (Optional 6mm)	3.6mm (Optional 6/12mm)
	Angle of View(H)	86.5° (55.4°)	76.8° (49.9°/25°)
	Shutter	Auto/Manual, 1/6~1/100000 s	
	Min. Illumination	Colour: 0.005 Lux (F1.8, AGC ON), 0 Lux with IR On	
	IR Range	Up to 30M IR range	
	Day/Night	IR-cut filter with auto switch (ICR)	
	S/N	>52dB	>55dB
	WDR	120dB	
	Defog	Digital Defog	
	Noise Reduction	2D/3D DNR	
	VIDEO	Video Compression	H.265/H.264/MJPEG
Frame Rate		Main Stream:2MP(1920×1080) Max. 30fps; Sub Stream:2MP(1920×1080) Max. 30fps; Third Stream: D1(720×576) Max. 30fps	
BLC		Supported	
9:16 Corridor Mode		Supported	
ROI		Up to 8 areas	
HLC		Supported	
OSD		Up to 8 OSDs	
Motion Detection		Up to 4 areas	
SMART	Privacy Mask	Up to 8 areas	
	Behavior Detection	Intrusion, crossing line, Motion detection	
	Intrusion	Enter and loiter in a pre-defined virtual region	
	Cross line	Cross a pre-defined virtual line	
	Motion detection	Moving within a pre-defined virtual region	
	Recognition	Face detection, Audio detection	
	Intelligent Identification	Defocus, Scene Change	
	Statistical Analysis	People counting	
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication		



IR IP H.265 COMPACT BULLET CAMERA




ENV-HCB5F-30R-12/ENV-HCB7F-30R-11

SPECIFICATION

MODEL	Model No.	ENV-HCB5F-30R-12	ENV-HCB7F-30R-11
	Type	2MP IR IP H.265 Compact Bullet Camera	4MP IR IP H.265 Compact Bullet Camera
NETWORK	Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, SSL, TLS	
	Compatibility	ONVIF, API	
	Network	1 RJ45 10M/100M Base-TX Ethernet	
GENERAL	Power Supply	12 V DC±25%, PoE (IEEE802.3 af)	
	Power Consumption	Max 6.4W	
	Working Environment	-35°C ~ +60°C, Humidity ≤10%~95% RH(Non-condensing)	
	Ingress Protection	IP67	
	Dimensions	157.3x62.4x63 mm	
	Weight	0.45Kg	

Dimension Unit: mm

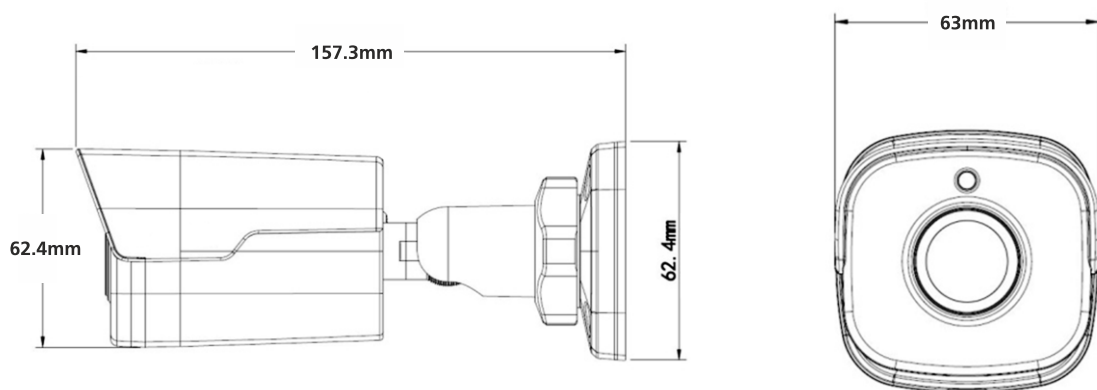

Ordering Information

Part Number	Description	Standard Quantity
ENV-HCB5F-30R-12	2MP IR IP H.265 Compact Bullet Camera with 4mm (Optional 6mm) Fixed Lens, PoE, Smart Analytics and 30M IR support	1
ENV-HCB7F-30R-11	4MP IR IP H.265 Compact Bullet Camera with 3.6mm (Optional 6/12mm) Fixed Lens, PoE, WDR, Smart Analytics and 30M IR support	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HCB5F-30R-12	Carton Box	0.45	157.3x62.4x63
ENV-HCB7F-30R-11	Carton Box	0.45	157.3x62.4x63

