WALL MOUNT OPTICAL TERMINAL BOX EXTERNAL

The OptiNor range of wall mount cabinets designed for external environment. It is made of ABS plastic and is used for fiber optic cable splicing, distribution, connection and protection. It comes with locking and earthing systems with the complete protection of fibre cables and accessories.

RoHS

FEATURES

Can load maximum 8pcs 1:8, 2pcs 1:32 or 1pc 1:64 box type splitter
Support cable entry without cutting
Max.4pcs splice tray for 96 fiber splicing
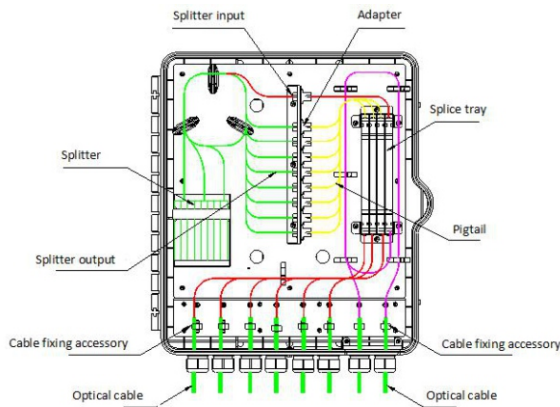Maximum 6pcs PG21 cable port + 2 rubber cable port

APPLICATION

Widely used in FTTH access Network
Telecommunication Network
Datacommunication Network

DESIGN & MATERIALS

Material	ABS Plastic
Protection Rate	IP 65
Maximum Adaptor position	72
Max Splice Port	96
Mounting Type	Wall and Pole

DESIGN & MATERIALS

ORDERING INFORMATION

Part Number	Description	Dimension (mm)
717-11SC032X	Wall Mount Fibre Termination Box IP65 (loaded with 1no. of 1 x 32 SC SM Insertion Module Type Splitter)	397x467x125