


# 110 PATCH PLUG

This patch plug design utilizes internal pair isolation and layered contacts to improve crosstalk performance. Additionally, plug housing includes built-in polarization to ensure a proper mated connection to connecting blocks. 110 patch plug is tested and verified to meet and exceed category 5e ANSI/TIA/EIA-568-B.2 connecting hardware specifications to support both high-speed data and voice applications.

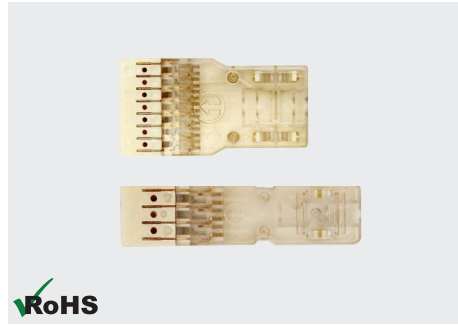

## SPECIFICATION

Operating Temperature Range	-10 °C to +60 °C
Housing Material	High Impact flame retardant PC
Contact Material	Phosphor Bronze with 1.25 µm silver over nickel plating
Contact Stability	5 Ω max. change
Plug Retention Force(Depending On Pair Size)	27 - 110 N
Insertion Life	> 200 insertions

## ORDERING INFORMATION

Part Number	Description
234-01	110 Wiring Patch Plug 1P
234-02	110 Wiring Patch Plug 2P
234-04	110 Wiring Patch Plug 4P

## PACKING INFORMATION

Part Number	Packing Qty.	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
234-01	50 x 20 x 1	Carton Box	5.0	6.0	580 x 270 x 250
234-02	50 x 20 x 1	Carton Box	6.0	7.0	580 x 270 x 250
234-04	50 x 20 x 1	Carton Box	7.0	8.0	580 x 270 x 250