

5MP STARLIGHT IP H.265 BULLET CAMERA



ENC-HBU8M-50R-20



FEATURES

Starlight illumination
Day/Night functionality
Smart IR, Up to 50M
WDR Up to 120 dB
2D/3D DNR
H.265+, H.265, H.264, MJPEG
Embedded smart algorithm
Triple streams
ROI, 3-Axis
Corridor mode
Customized OSD, ONVIF (Profile S/G)
PoE, IP67



UL No: **E491809**

Field Of View

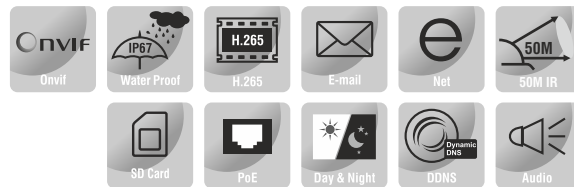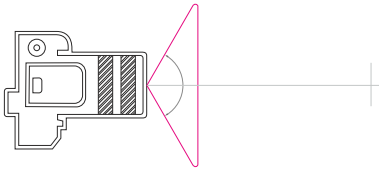

SPECIFICATION

MODEL	Model No.	ENC-HBU8M-50R-20
CAMERA	Type	5MP Starlight IP H.265 Bullet Camera
	Image Sensor	1/2.7", Progressive scan, 5.0Megapixel, CMOS
	Lens	2.7~13.5mm (Motorized lens)
	Angle of View (H)	93.38° ~ 28.56°
	Minimum Illumination	Colour: 0.002Lux @F1.2 BW: 0Lux with IR on
	AGC	Auto/Manual
	Shutter	Auto/Manual, shutter time: 1 ~ 1/100000s
	Digital noise reduction	2D/3D DNR
	IR Range	Up to 50m
	Day/Night	IR-Cut filter with auto switch (ICR)
	S/N	>52dB
	Defog	Digital Defog
	WDR	120dB
	VIDEO & AUDIO	Max. Resolution
Video Compression		H.265+, H.265, H.264, MJPEG
Frame Rate		Main Stream:5MP(2592 x 1944): Max.20 fps, 5MP(2592 x 1944): Max.25fps(WDR OFF), 4MP(2560 x 1440): Max. 30 fps, 3MP(2048x 1536): Max. 30 fps, 2MP(1920 x 1080): Max.30 fps; Sub Stream:2MP(1920 x 1080): Max.30 fps; Third Stream:D1(720 x 765): Max.30 fps
Video Streaming		Triple
Corridor Mode		Supported
ROI		Up to 8 areas
HLC & BLC		Supported
Motion Detection		Up to 4 areas
OSD		Up to 8 OSDs
Privacy Mask		Up to 8 areas
Audio Compression	G.711U/G.711A	
Two-way audio	Supported	



5MP STARLIGHT IP H.265 BULLET CAMERA




ENC-HBU8M-50R-20

SPECIFICATION

MODEL	Model No.	ENC-HBU8M-50R-20
	Type	5MP Starlight IP H.265 Bullet Camera
SMART	Behavior Detection	Intrusion, Crossing line, Motion detection.
	Intelligent Identification	Face detection, Audio detection, Defocus, Scene change, Missing object, Abandoned object.
	Statistical Analysis	People counting
	General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
NETWORK	Protocols	IPv6, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
	Compatibility	ONVIF (Profile S/G), API
	Network	RJ45 10M/100M Base-TX Ethernet
INTERFACE	Audio I/O	1/1
	Alarm I/O	1/1
GENERAL	Power Supply	12 V DC±25%, PoE (IEEE802.3 af) Power Consumption: 10W
	Operating Temperature	-35°C ~ +60°C, Humidity: ≤95% RH (non-condensing)
	Dimensions	253.4x86x71.7 mm
	Weight	1.0Kg
	Storage	Micro SD, Up to 256 GB
	ANR	Supported
Ingress Protection	IP67	

Dimension Unit: mm

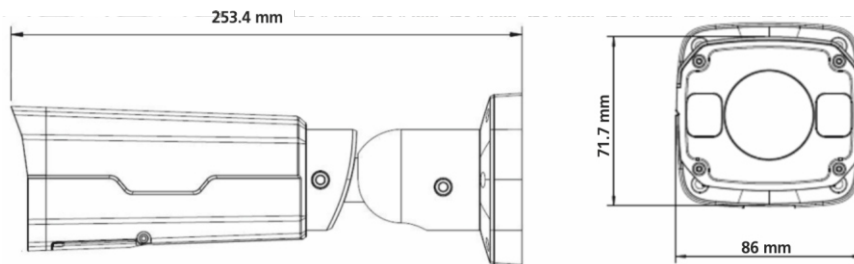

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU8M-50R-20	5MP Starlight IP H.265 Bullet camera with 2.7 to 13.5mm Motorized Lens, POE, SD card slot, WDR, Smart Analytics and 50M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU8M-50R-20	Carton Box	1.0	253.4x86x71.7

