


# FIBRE OPTIC SPLICE CLOSURE

FOSC Vertical/Dome splicing closures are excellent protector of fibre optic joints from outdoor environment such as UV, water and weather with leak proof sealing. For easy splicing operation, closure consists of well managed no. of cable through and splice tray.

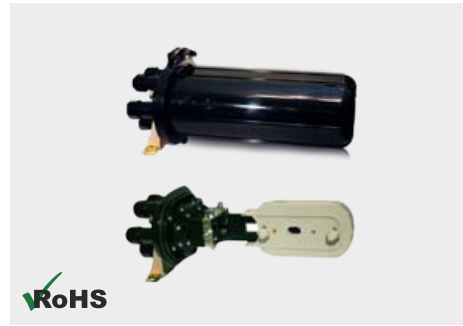

## SCOPE OF APPLICATION

Aerial  
Stand pole

## FEATURES

Made of high strength polycarbonate.  
Perfect Leak Proof with reliable sealing.  
4 - 6 cable through for easy installation.  
Suitable for Bunchy & Ribbon Fibre.

Characteristics	FOSCV1	FOSCV2
Outside Dimension (H x D)	390 x 190mm	455 x 220mm
Weight	2400-3000g	3300-4200g
No. of Inlet:Outlet	4 pieces	6 pieces
Cable Diameter	8-16mm	8-21mm
Ambient Temperature Range	-40°C to 65°C	
Max. Splice	Bunchy : 96 Core Ribbon : 144 Core	Bunchy : 240 Core Ribbon : 576 Core

Part Number	Description	No. Of Fibre Splice
325-V1012	12 Core Vertical Splice Closure V1	12
325-V1024	24 Core Vertical Splice Closure V1	24
325-V1048	48 Core Vertical Splice Closure V1	48
325-V1072	72 Core Vertical Splice Closure V1	72
325-V1096	96 Core Vertical Splice Closure V1	96
325-V2048	48 Core Vertical Splice Closure V2	48
325-V2096	96 Core Vertical Splice Closure V2	96
325-V2144	144 Core Vertical Splice Closure V2	144
325-V2192	192 Core Vertical Splice Closure V2	192