

2MP FIXED DOME CAMERA



ENV-HCV5F-15R-18

FEATURES

2.8 / 4 mm Fixed Lens

Smart IR Up to 15 m

ONVIF Profile (S,G,T)

Built In Mic

IP67,IK10,PoE



SPECIFICATION

MODEL	Model No.	ENV-HCV5F-15R-18
	Type	2MP FIXED DOME CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR-cut filter with auto switch (ICR)
	Lens	2.8mm / 4.0 mm
	Detection distance	45 m (2.8mm Lens), 64.3 m (4mm Lens)
	Observation Distance	18 m (2.8 mm Lens), 25.7 m (4mm Lens)
	Recognition Distance	9 m (2.8mm Lens), 12.9 m (4mm Lens)
	Identification Distance	4.5 m (2.8 mm Lens), 6.4 m (4mm Lens)
	Angle of View (H)	107.8° (2.8mm) / 82.0° (4.0mm)
	Angle of View (V)	56.7° (2.8mm) / 41.4° (4.0mm)
	Angle of View (O)	140.2° (2.8mm) / 100.9° (4.0mm)
	Adjustment angle	Pan: 0° ~ 90°, Tilt: 0° ~ 65°, Rotate: 0° ~ 360°
	Shutter	Auto / Manual, 1 ~ 1/100000s
	Minimum Illumination	Colour: 0.005 lux F2.0, 0 lux with IR
	AGC	Auto / Manual
	S/N	>52 dB
	Smart IR	Up to 15 m
	Wavelength	850 nm
Defog	Smart Defog	
WDR	DWDR	
Warm Light Range	N/A	

None

★Product specification and availability are subject to change without notice.

2MP FIXED DOME CAMERA



ENV-HCV5F-15R-18

MODEL	Model No.	ENV-HCV5F-15R-18
	Type	2MP FIXED DOME CAMERA
VIDEO	Video Compression	H.265+, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main profile, High profile
	Frame Rate	Main Stream: 2MP (1920*1080) @ 30fps; Sub Stream: 2MP (1920*1080) @ 30fps; Third Stream: D1 (720*576) @ 30fps
	Video Bit Rate	128 Kbps~16 Mbps
	OSD	Up to 8 OSDs
	Privacy Mask	Up to 8 areas
	ROI	Up to 8 areas
	Motion Detection	Up to 4 areas
	White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
	Digital noise reduction	2D / 3D DNR
	Dewarping	N/A
	HLC	Supported
	BLC	Supported
	Corridor Mode	Supported
AUDIO	Audio Compression	G.711
	Two-way Audio	Supported
	Suppression	Supported
	Sampling Rate	8KHZ
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion, cross line, motion detection
	Intelligent Identification	Defocus, Scene Change, Abandoned Object, Moving Object, Face detection, Audio detection
	Statistical Analysis	People counting
	General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication
INTERFACE	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
	Compatibility	ONVIF (Profile S,G,T), API
	Client	Eyenor VMS
	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
	Edge Storage	Micro SD Card Slot up to 256GB support
	Network	10/100M Base-TX Ethernet
	Audio I/O	1/1
	Alarm I/O	N/A
	Edge Storage	MicroSD card slot, up to 256 GB
	ANR	Supported
	Built-in Speaker	N/A
GENERAL	Power Supply	DC 12V, PoE (IEEE 802.3af)
	Power Consumption	Max 4.5W
	Working Environment	-30°C ~ 60°C , Humidity: ≤95% RH (non-condensing)
	Storage Environment	-30°C ~ 60°C , Humidity: ≤95% RH (non-condensing)
	Surge Protection	4KV
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Reset Button	N/A
	Dimensions	Φ110 x 61 mm
	Weight	0.25 kg

None

★Product specification and availability are subject to change without notice.


2MP FIXED DOME CAMERA



ENV-HCV5F-15R-18

MODEL	Model No.	ENV-HCV5F-15R-18
	Type	2MP FIXED DOME CAMERA

Dimension Unit : mm

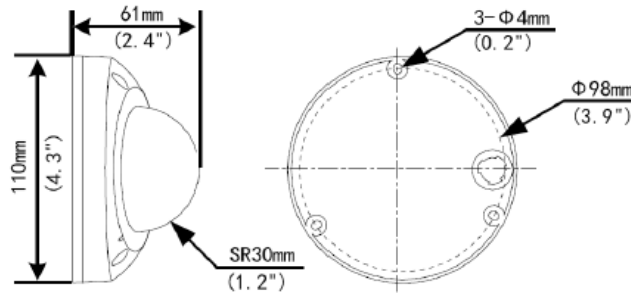

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCV5F-15R-18	2MP IR IP H.265 Vandal Proof Compact Dome Camera with 2.8mm (Optional 4mm)Fixed Lens, PoE, SD Card slot, Smart Analytics, Buil-in Mic and 15m IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HCV5F-15R-18	Carton Box	0.25	Φ110 x 61 mm

None

★Product specification and availability are subject to change without notice.