

Waterproof Dynamic Facial Recognition Access Controller


NAC-4010DF adopt the latest biometric solution and high speed stable ARM processor. The product's recognition, speed and other performance indicators are in the industry leading level. This model is having IP65 protection level makes the product suitable use in outdoor environment

Application

It can be used in Office, Schools, Factories etc

Features

- 5 inch touch screen display
- Faster recognition (Less than 1 second)
- Waterproof (IP65)
- Mask detection function
- Multiple authentication methods

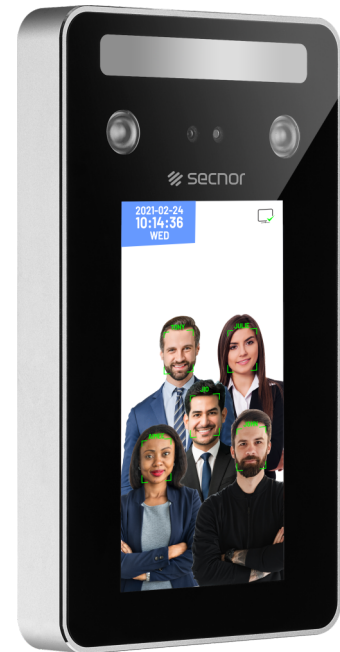


Technical Parameters

Screen size	5 inch Capacitive touch screen
CPU	1.2GHz dual core ARM Cortex-A7
RAM	256MB DDR3
Memory capacity	4GB
Camera	Dual Camera (200W Color + 200W infrared live Camera)
Verification Methods	Facial Recognition/ RFID Card/Password
Maximum Number of Users	5000
Facial Recognition Accuracy	99.7%
Facial recognition distance	0.5m - 1.5m
Automatic light filling Option	Yes
Ambient light adaptation Range	0 to 50000 Lux
Communication methods	LAN, Wifi, USB (to connect USB drive to download data)
Working Voltage	12V DC
Wiegand output	Yes
Working Temperature	-15°C to +45°C
Working Humidity	20% to 90%
Dimensions(LxWxH)	185x110x20mm

Waterproof Dynamic Facial Recognition Access Controller

Dimensions:

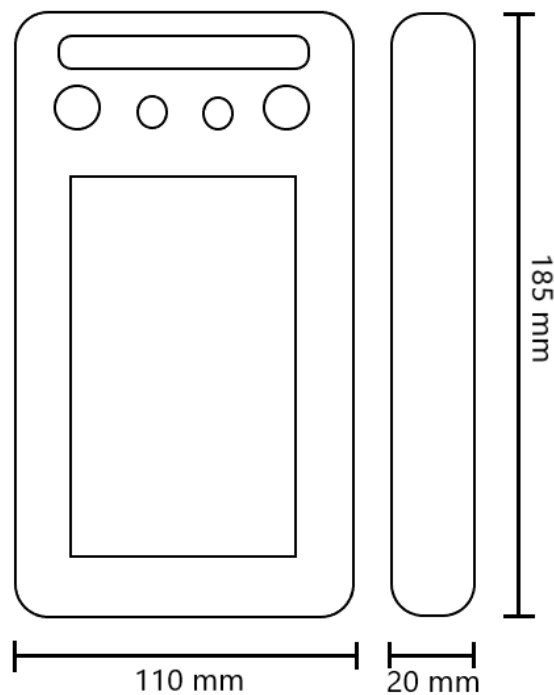

Ordering Information

Part Number	Description
NAC-4010DF	Waterproof Dynamic Facial Recognition Access Controller
NAC-4010DFMF	Waterproof Dynamic Facial Recognition Access Controller (Mifare)