

Digital Conference System controller



DESCRIPTION

NVS-DC900013CH is a Conference Controller (conference host) with complete digital design. It will support all kinds of conference system has first-to-speaker rights and line up automatically function.

FEATURES


- o The panel is provided with digital display and multiple operation mode indicators. The operating state is clear at a glance.
- There are three function setup keys: Mode, Set and Enter.
- Multiple system link sockets.
- o It supports multiple conference modes: Free speech mode, alternation mode and limit speech mode.
- Maximum 120 microphones can be connected
- Built-in feedback restraint circuit

Specifications		
Model	NVS-DC900013CH	
Max power	65W	
Static power	8W	
Output power	≤36W/18V/channel	
Audio output	Impedance: 100Ω unbalanced	
Control Interface	RS232	
Audio output Terminal	XLR,RCA	
Conference Modes	Free,Chairman,Auto	
Input sensitivity	100±10mV	
Frequency Response	50Hz-16kHz	
Signal to Noise Ratio	>65dB	
Microphone Connection	RJ45 and 8 Pin Din	
Distortion	<0.5%	
Power	AC220V	
Weight	6.5KG	
Dimension(L x W x H)	484x 365x88mm	




Digital Conference System controller

FRONT PANEL

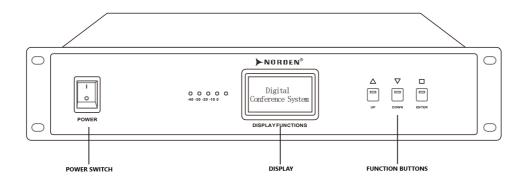

REAR PANEL

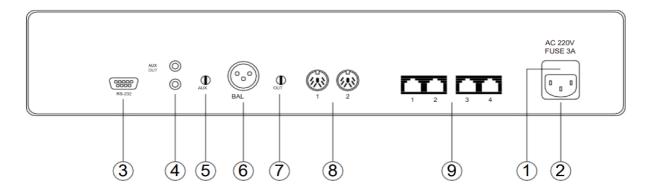

- 1. Fuse Mount Holder
- 2. AC 220V Input
- 3. RS232 Interface
- 4. Line Input & Output Ports (Can be connect to additional audio equipment for playback and recording)
- 5. AUX Volume Control Knob
- 6. Audio Output Interface (XLR Connector)
- 7. Output Volume Control Knob
- 8. Chairman & Delegate Unit Connection Socket
- 9. RJ45 Ports

NVS-DC900013CH



Digital Conference System controller

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-DC900013CH	Digital Conference System controller	01

ACCESSORIES INFORMATION

Description	Standard Quantity
5m 8pin Din Cable	1
Power Cord	1
User Manual	1