

2MP STARLIGHT IP H.265 HIGH SPEED PTZ DOME CAMERA



ENC-HHP5Z-150R-20

FEATURES

Starlight illumination
33X Optical Zoom
16X Digital Zoom
Smart IR, Up to 150m
Up to 120dB WDR
H.265+, H.265, H.264, MJPEG
ONVIF (Profile S, G, T)
IP66



SPECIFICATION

MODEL	Model No.	ENC-HHP5Z-150R-20
	Type	2MP Starlight IP H.265 High Speed PTZ Dome Camera
CAMERA	Image sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS
	Lens	4.5 ~ 148.5mm, AF automatic focusing and motorized zoom lens
	Angle of View (H)	56.2° ~ 2.6°
	Shutter	Auto/Manual, shutter time: 1 ~ 1/100000s
	Minimum Illumination	Colour: 0.001Lux @F1.5 BW: 0Lux with IR on
	AGC	Auto/Manual
	Optical Zoom	33x
	Digital Zoom	16x
	Iris	F1.5 ~ F4.0
	Day/Night	IR-cut filter with auto switch (ICR)
	Digital noise reduction	2D/3D DNR
	S/N	>52dB
	IR Range	Up to 150 m
	Defog	Digital Defog
WDR	120dB	
VIDEO & AUDIO	Max.Resolution	1920 x 1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; Third Stream: D1 (720*576), Max 30fps
	HLC/BLC	Supported
	EIS	Supported
	OSD	Up to 8 OSDs
	Privacy Mask	Up to 24 areas
	ROI	Up to 8 areas
	Audio Compression	G.711U/G.711A
	Two-way audio	Supported



2MP STARLIGHT IP H.265 HIGH SPEED PTZ DOME CAMERA




ENC-HHP5Z-150R-20

SPECIFICATION

MODEL	Model No.	ENC-HHP5Z-150R-20
	Type	2MP Starlight IP H.265 High Speed PTZ dome camera
SMART	Behavior Detection	Intrusion, Cross line, Motion detection, Region, Entrance / Exit Detection
	Intelligent Identification	Face detection, Audio detection
	Auto Tracking	Supported
	General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
INTERFACE	Protocols	IPv6, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, SSL, QoS
	Compatibility	ONVIF (Profile S, G, T), API/SDK
	Network	RJ45 10M/100M Base-TX Ethernet
	Audio I/O	1/1
	Alarm I/O	2/1
PAN & TILT	Pan Range	360° (Endless)
	Pan Speed	0.2°/s ~ 75°/s, Preset speed: 180°/s
	Tilt Range	-15° ~ +90° (auto flip)
	Tilt Speed	0.2° ~ 75°/s, Preset speed: 80°/s
	Number of Presets	1024
	Patrol	Preset patrol, Route patrol, Recorded patrol
GENERAL	Home Position	Supported
	Power	DC 12V±25%, PoE+ (IEEE802.3 at)
	Max.Power consumption	25W
	Storage	Micro SD Slot, Up to 256 GB
	ANR	Supported
	Reset Button	Supported
	Working Environment	-40° ~ 65°C, Humidity: ≤95% RH (non-condensing)
	Ingress Protection	IP66
Dimension	220x220x369 mm	
Weight	3.4kg	

Dimension Unit: mm

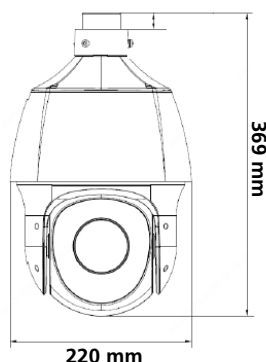

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HHP5Z-150R-20	2MP Starlight IR IP H.265 High Speed PTZ Dome Camera with 33X Optical Zoom, PoE+, WDR, Micro SD Card Slot, Smart Analytics and 150m IR Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HHP5Z-150R-20	Carton Box	-	-

