


# 4MP H.265 IR IP DOME CAMERA



ENC-HDO7F-15R-65

## FEATURES

1/3" Progressive Scan CMOS
2.8mm (3.6/6mm optional)
4MP@20fps,3MP@30fps,1080P@30fps
Triple Streams
Smart IR Range 10-15M
Low bitrate ,Excellent low light performance
WDR,3D DNR
ROI,Defog,HLC,Corridormode,DIS
Compact Design

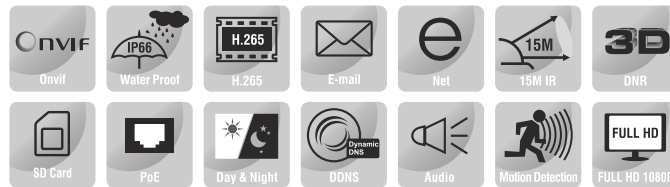

## SPECIFICATION

MODEL	Model No.	ENC-HDO7F-15R-65
	Type	4MP H.265 IR IP Dome Camera
CAMERA	Image Sensor	1/3" Progressive Scan CMOS
	Min. illumination	Color 0.05Lux;IR ON 0 Lux
	Day/Night	ICR
	Shutter Speed	1/5-1/20000
	Auto Iris	Fixed
	Wide Dynamic Range	WDR>120dB
	Digital Noise Reduction	2D/3D
	Lens	2.8mm(3.6/6mm optional)
	FOV	90°
	IR LED	2pcs
IR Range	10-15M	
IMAGE	Video Compression	H.264/265,MJPEG
	Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
	Audio Compression	G.711 ,RAW_PCM
	Max. Resolution	2592*1520/2560*1440/20fps,2304*1296/30fps,1920x1080/30fps
	Stream	Stream1: 2592*1520/2560*1440/2304*1296/1920x1080, Stream 2: D1 to QVGA
	Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
	HLC	Yes
	9:16 Corridor mode	Yes
	ROI	Auto
	Defog	Yes



# 4MP H.265 IR IP DOME CAMERA




ENC-HDO7F-15R-65

## SPECIFICATION

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HDO7F-15R-65</b>	
	Type	4MP H.265 IR IP Dome Camera	
<b>NETWORK</b>	Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.	
	Alarm Trigger	Motion Detection, Network disconnect, Disk alarm, I/O alarm	
	RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.	
	Security	User security authentication, Reset, Hardware WatchDog	
	Web Language	English, Polish, Italian, Portuguese, Spanish	
	System Compatibility	Onvif, CGI	
<b>INTERFACE</b>	Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector	
	Microphone	Yes, built-in	
	Audio I/O	1ch Audio In&1ch Audio Out	
	Alarm I/O	Optional 1ch Alarm In/Out	
	RS485	N/A	
	BNC Output	N/A	
	Reset Button	Yes (build-in)	
	Edge Storage	N/A	
	<b>GENERAL</b>	Power Supply	DC 12V/PoE
		Power Consumption	5W(IR LED OFF); 7W (IR LED ON)
Operating Temperature		-40 °C ~ 60 °C (-40 °F ~ 140 °F)	
Operating Humidity		0% - 90% RH	
Ingress Protection		IP66	
Approvals		CE / FCC	
Dimensions		119.09x89.1mm	
Weight	0.5Kg		

Dimension Unit: mm

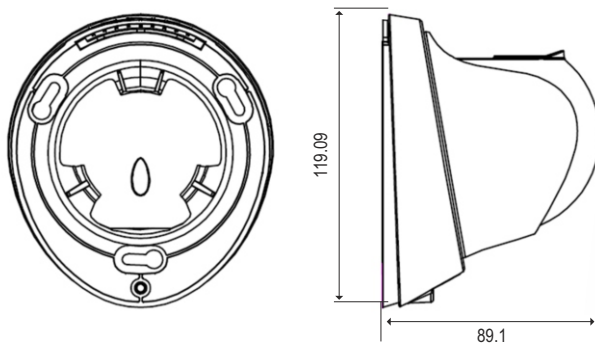

## Ordering Information

Part Number	Description	Standard Quantity
ENC-HDO7F-15R-65	4MP H.265 IR IP Dome Camera with 3.6mm (optional 2.8/6mm) Fixed lens, PoE, WDR and 15M IR support	1

## Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HDO7F-15R-65	Carton Box	0.5	119.09x119.09x89.1

