

6MP IR IP HEMISPHERIC DOME CAMERA




ENC-HDO9H-10R-56

FEATURES

- 1/1.8" Progressive Scan CMOS
- 6MP Resolution
- Unique De-warping Image
- Low bitrate, Excellent low light performance
- 3D DNR, dWDR, ICR, HLC
- Smart IR Range 10M



Field Of View

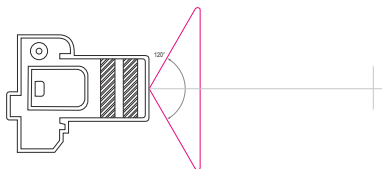

SPECIFICATION

MODEL	Model No.	ENC-HDO9H-10R-56
CAMERA	Type	6MP IR IP Hemispheric Dome Camera
	Image Sensor	1/1.8" Progressive Scan CMOS
	Min. illumination	Color 0.01Lux(AGC ON);IR ON 0 Lux
	Day/Night	ICR
	Shutter Speed	1/5-1/50000
	Auto Iris	N/A
	Wide Dynamic Range	dWDR
	Digital Noise Reduction	2D/3D
	Lens	1.6 mm
	FOV	360°
IR LED	6pcs	
IR Range	10M	
IMAGE	Video Compression	H.264 High/Main/Baseline Profile, MJPEG
	Bit Rate (CBR/VBR)	500kb-12000kb
	Audio Compression	G.711, RAW_PCM
	Max. Resolution	3072*2048@15fps
	Stream	Stream 1: 3072*2048@15fps , 1920*1920/1440*1440/1920*1080@20fps; Stream 2: 1280*1280/720*720/D1@15fps/25fps/30fps
	Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
	De-warping	1F+3/5/7, 180 degrees panorama
	HLC	Yes
	9:16 Corridor mode	N/A
	DIS	N/A
ROI	N/A	
Defog	N/A	



6MP IR IP HEMISPHERIC DOME CAMERA





ENC-HDO9H-10R-56

SPECIFICATION

MODEL	Model No.	ENC-HDO9H-10R-56
	Type	6MP IR IP Hemispheric Dome Camera
NETWORK	Network Protocols	HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast Supported.
	Alarm Trigger	Motion Detection, Network disconnect, Disk alarm
	RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
	Security	User security authentication, Reset, Hardware WatchDog
	Web Language	English, Polish, Italian, Portuguese, Spanish
	System Compatibility	Onvif, CGI
INTERFACE	Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
	Audio I/O	1ch Audio In, 1ch Audio Out
	Alarm I/O	1ch Alarm In, 1ch Alarm Out
	RS485	N/A
	BNC Output	N/A
	Reset Button	Yes
	Edge Storage	Micro SD/SDHC/SDXC slot, Max 64GB
GENERAL	Power Supply	AC24V/DC 12V/PoE
	Power Consumption	5W(IR LED OFF); 8W(IR LED ON)
	Operating Temperature	Starting Temperature: -30 °C ~ 60 °C (-22 °F ~ 140 °F) Working Temperature: -40 °C ~ 60 °C (-40 °F ~ 140 °F)
	Operating Humidity	0% - 90% RH
	Ingress Protection	IP66
	Dimensions	160x160x46.8mm
Weight	0.70Kg	

Dimension Unit: mm

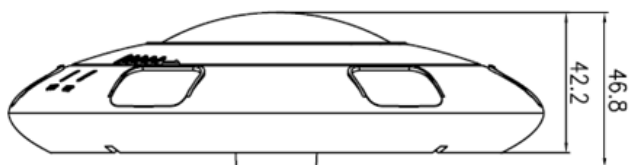

Ordering Information

Part Number	Description	Standard Quantity
ENC-HDO9H-10R-56	6MP IR IP Hemispheric Dome Camera with 1.6mm Fisheye lens, PoE, SD card slot and 10M IR support	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HDO9H-10R-56	Carton Box	0.70	160x160x46.8

