


# 64CH NETWORK VIDEO RECORDER



## ENR-08064-N-FRK

### FEATURES

- 64 Channel input
- Support H.265+, H.265, H.264 video formats
- 8 SATA HDDs
- HDMI and VGA simultaneous output
- Support RAID (0/1/5/6/10)
- eSATA Interface
- ONVIF Profile S
- N+1 Hot-Standby

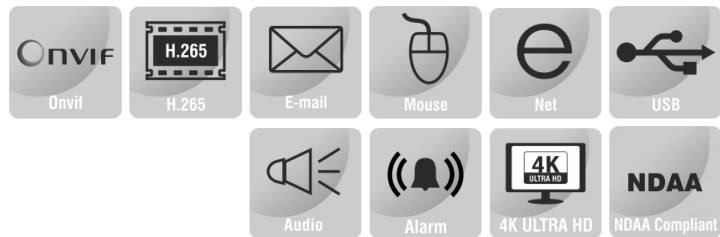

### SPECIFICATION

MODEL	Model No.	ENR-08064-N-FRK
	Type	64CH NETWORK VIDEO RECORDER
VIDEO & AUDIO	Video Input	64-Ch
	Incoming Bandwidth	384Mbps
	Outgoing Bandwidth	384Mbps
	HDMI/VGA Output	HDMI 1: 3840x2160, 1920x1080, 1280x1024, 1024x768 HDMI2/VGA: 1920x1080, 1280x1024, 1024x768
	Audio Input / Output	1-ch Input/ 1-ch Output
	Two way Audio	Supported
	Multi-screen Display	1st Screen: 1/4/8/9/16/32/36/64 2nd Screen: 1/4/8/9/16
	OSD Type	Channel Name, Date
DECODING	Video Compression	H.265+, H.265, H.264
	Video Bit Rate	5Mbps
	Audio Compression	G.711A / G.711U
	Bit Rate Type	CBR, VBR
	Recording Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1
	Recording Mode	Manual, Schedule (Regular, Continuous), Event
	Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
	Decoding Capability	1x12MP, 4x8MP, 8x4MP, 16x1080P, 32xD1, 64xD1
	Synchronous Playback	16/9/4/1
MONITORING	Playback Capability	1x12MP, 4x8MP, 9x1080p, 16x1080P
	Live View Functions	Snapshot, Record, Digital Zoom, Record, PTZ toolbar, Volume adjustment, Image Setting
	Playback functions	Sync playback, Play, Pause, Stop, Fast play, Slow play, Full Screen, Backup selection, Snapshot, Search by events, Picture grid
	Search Mode	Time/Date, Alarm, Picture grid, Event
	Backup Mode	USB, Network, eSATA
	Export Picture Format	MP4

★Product specification and availability are subject to change without notice.


# 64CH NETWORK VIDEO RECORDER



## ENR-08064-N-FRK

MODEL	Model No.	ENR-08064-N-FRK
	Type	64CH NETWORK VIDEO RECORDER
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, DHCP, DNS, DDNS, RTP/RTSP/RTCP, PPPoE, NTP, FTP, UPnP, SMTP, IGMP, SNMP, P2P, IP Filter, 802.1X, Multicast, 3G/4G
	Compatibility	ONVIF Profile S, SDK / CGI
	Network	2xRJ45 (10/100/1000 Mbps) Self Adaptive Ethernet Port
	Serial Interface	1xRS485, 1xRS232
	USB Interface	2xUSB 2.0, 2xUSB 3.0
	Alarm Interface	16 Input & 6 Output
SMART	Alarm Management	Input & Output event, Alarm I/O error, IP Conflict, Hard disk full, No hard disk, Hard disk R/W error, HDD SMART check error, Abnormal recording, Hot spare error & Array error, Motion detection, Tampering (Masking), Smart detection, Video loss
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Analytics	Loitering, Multi Loitering, Abandoned object (Object Left), Missing object (Object Lost), Face Detection, People Counting, Human & Vehicle Detection, Wrong Way Detection, Abnormal Speed, Illegal Parking *Compatible with analytic supported cameras
STORAGE	SATA	8 SATA Interfaces
	Capacity	Up to 12TB for each HDD
	Array Type	RAID 0/1/5/6/10
	eSATA	Supported
	ANR	Supported
GENERAL	Operating System	Embedded Linux
	Remote Users	16
	Client Application	EyeGuard
	Power	100 ~ 240V AC
	Redundant Power	N/A
	Power Consumption (without HDD)	<15 W
	Working Environment	-10°C ~ 55°C
	Working Humidity	<90% RH
	Reset Button	Supported
	Chassis	2U
	Dimension	440 × 433.5 × 93 mm
Net Weight (without HDD)	7.2 Kg	

Dimension Unit : mm



### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-08064-N-FRK	64 Ch Embedded Network Video Recorder with 8 HDD Bays Supports 4K Cameras, RAID, HDMI, VGA and ONVIF	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENR-08064-N-FRK	Carton Box	-	-

★Product specification and availability are subject to change without notice.