


3 CORE 20 AWG BRAID SHIELDED MICROPHONE CABLE LSZH



Norden Microphone cable have 3 Conductor 20 AWG high-conductivity tinned copper conductors with LSZH insulation. Double braiding used as shielding with rayon braid & TC braid shield (85% coverage). Cotton wrap is used as separator and have LSZH outer jacket.

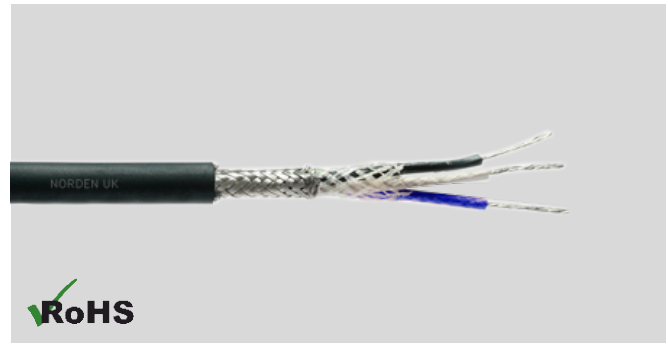

CABLE CONSTRUCTION


Conductor High Conductivity Tinned Copper	Inner Braid Rayon	Separator material Cotton Serve
Insulation LSZH	Outer Braid 85% TC - Tinned Copper	Outer Jacket LSZH

PHYSICAL CHARACTERISTICS

Characteristic	Value
No. of Conductor	3
Conductor Size	20 AWG, 26 x 0.16 mm
Insulation Diameter	2.1 ± 0.05 mm
Jacket Diameter	6.2±0.3 mm
Jacket Thickness	0.75 mm
Max. Recommended Pulling Tension	480 N
Operating Temperature	-20°C to +60°C

ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Conductor DC Resistance:	Ω/km	34.9
Nom. Capacitance Cond. to Cond.	pF/m	98
Characteristic Impedence	Ω	52
Max Operating Voltage	V	600
Max Recommended Current (25°C)	Amps	4
Sparker Test	VAC	3000

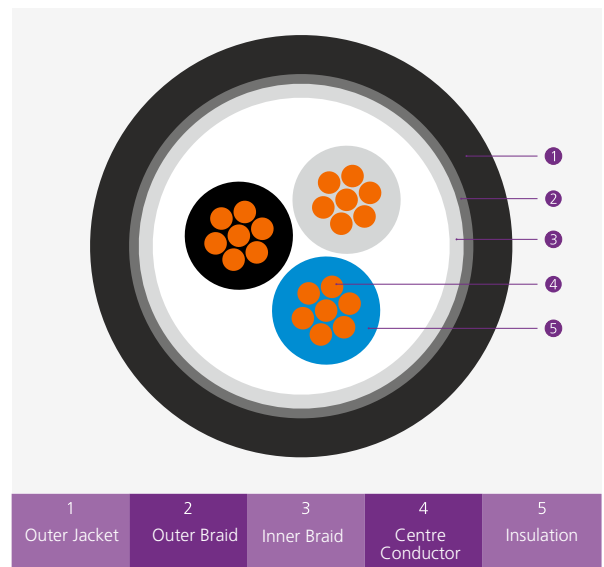

3 CORE 20 AWG BRAID SHIELDED MICROPHONE CABLE LSZH



INDIVIDUAL CORE COLOUR

Individual Core	Colour
Core 1	White
Core 2	Black
Core 3	Blue

ORDERING INFORMATION

Part Number	Description
97-22122003X	3 Core 20 AWG Braid Shielded Microphone cable LSZH