

2 Core 1.5 mm² Transparent Loudspeaker Cable



In-wall Speaker cable from NORDEN is suitable to use within Audio and Instrumentation Purposes. The cable is constructed with Stranded Copper Covered Aluminium and a transparent PVC Outer Jacket



CABLE CONSTRUCTION


Conductor Stranded Copper Covered Aluminium	Outer Jacket Transparent PVC
Jacket Color Transparent	

PHYSICAL CHARACTERISTICS

Characteristic	Value
No. of Conductor	2
Conductor Stranding	84 x 0.15 ± 0.005mm
Conductor O.D	1.58 mm
Cross Section Area	1.5mm ²
Outer Jacket	Transparent PVC
Jacket O.D	3.1 - 6.35 ± 0.10mm
Nom. Wall Thickness	0.75mm
Min. Wall Thickness	0.65mm
Operating Temperature	-20°C to +70°C

ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Max. Conductor DCR	Ohm/km	340
Max. Operating Voltage UL	V/min	30

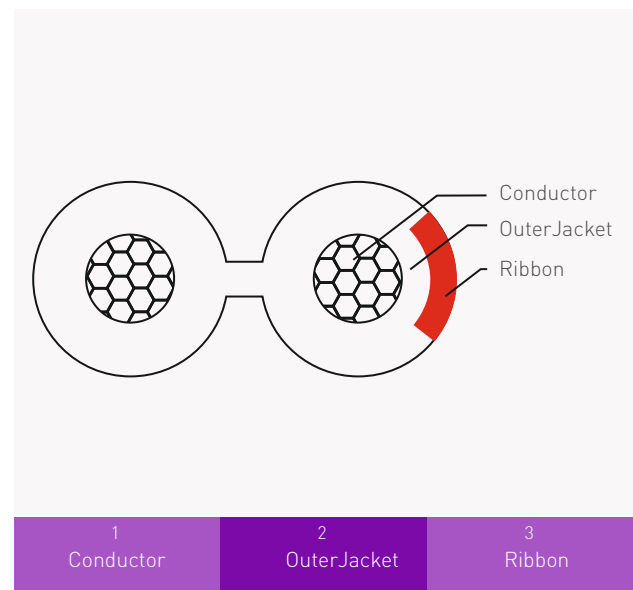

ORDERING INFORMATION

Part Number	Description
82-1002154X	2x1.5 mm ² Transparent Loudspeaker Transmission Cable PVC

Building & Industrial Cables