

NVS-PA0027002PM

Remote Paging Mic for 2 Zone PA System



DESCRIPTION

The NVS-PA0027002PM is a Remote paging station used with NVS-PA0025002CP and NVS-PA0026002CP. It has delicate and fashionable design with clear signal display. It is easy to operate with two switches to control paging. It is a stable and long-lasting choice that is perfect for a paging station.

FEATURES

- ⦿ RJ-45 interface for power supply & signal transmission
- ⦿ Built-in chime for paging reminder
- ⦿ Support cascaded linkage for easy connection
- ⦿ Special one-touch-to-talk design for convenient use
- ⦿ Working with NVS-PA0025002CP/NVS-PA0026002CP amplifier


Specifications

Model	NVS-PA0027002PM
Frequency Response	Mic: 100Hz-15kHz Line: 20Hz-18kHz
Input Sensitivity	Mic: 2.5mV Line: 250mV
Signal to Noise Ratio	Mic: 80dB Line: 90dB
Power Supply	AC220V/ 50Hz , DC24V
Weight	5.5 kg
Dimension	485×88×345mm

NVS-PA0027002PM

Remote Paging Mic for 2 Zone PA System

FRONT PANEL

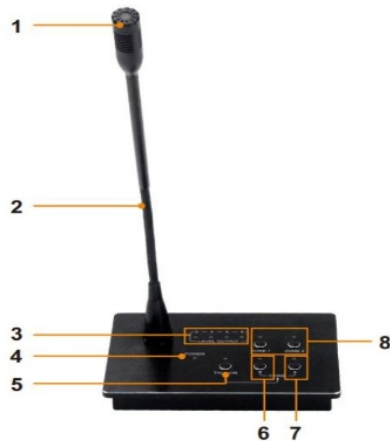

1. MIC
2. MIC rod (angle adjustable)
3. Signal indicator
4. Power indicator
5. MIC ON/OFF switch
6. Turn ON MIC with ascending tune
7. Turn OFF MIC with drop tune
8. ON/OFF switch of two zones

REAR PANEL



9. MIC volume adjustment knob
10. MIC extension interface
11. Connection interface with amplifier

NVS-PA0027002PM



Remote Paging Mic for 2 Zone PA System

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0027002PM	Remote Paging mic for 2 Zone PA System	01

ACCESSORIES INFORMATION

Description	Standard Quantity
Microphone stick	01
Microphone cap(black)	01
User Manual	01