

NVS-5003PM16EV

Voice Evacuation System

Remote Paging Microphone - 16 Button



DESCRIPTION

The NVS-5003PM16EV is a Voice Evacuation System Remote Paging Microphone of 16 Button. It comprises 16 zones for paging, including single, multiple area, group, and full area zones.

FEATURES

- Up to 32 remote paging MIC can be connected
- Dialing code address setting
- Extended external keyboard for up to 9 keyboards
- MIC has 1 AUX input, which can be used as a signal input for paging
- With RJ45 interface
- Support for loop connection
- Support key custom grouping function


| Specifications | |
|---------------------------------|--------------------------------|
| Model | NVS-5003PM16EV |
| Frequency Response | 80Hz~15kHz (± 3 dB) |
| Input Sensitivity and Impedance | Mic: 50mV 600 Ω |
| | Line: 1000mV 10k Ω |
| Signal to Noise Ratio | >75dB (A weighting) |
| Total Harmonic Distortion | <1% |
| PoE power supply | (48 ± 3)V/0.1A |
| Interface | RJ45 |
| Weight | 1.4Kg |
| Dimension | 166 \times 220 \times 54mm |

NVS-5003PM16EV




Voice Evacuation System Remote Paging Microphone - 16 Button

FRONT PANEL

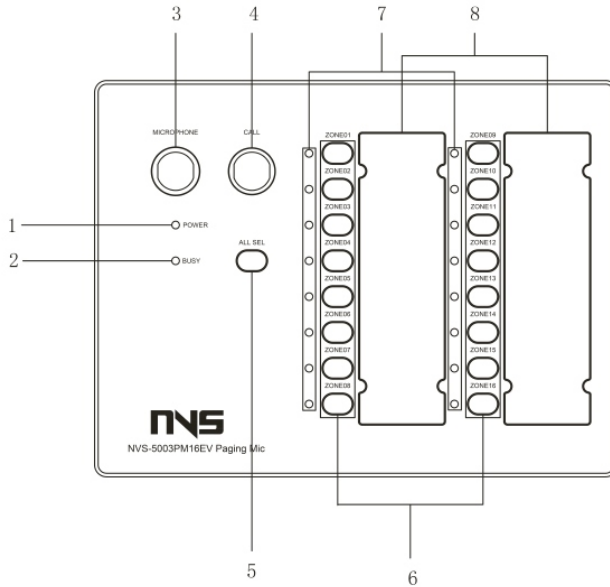

- 1. Power Indicator
- 2. Equipment 'busy' Indicator
- 3. MIC Rod Socket
- 4. Paging Start Key
- 5. Select All Key
- 6. Zone/Group Selector
- 7. Zone/group Selector and Work Status Indicator
- 8. Zone/group Selector and Work Status Indicator

REAR PANEL

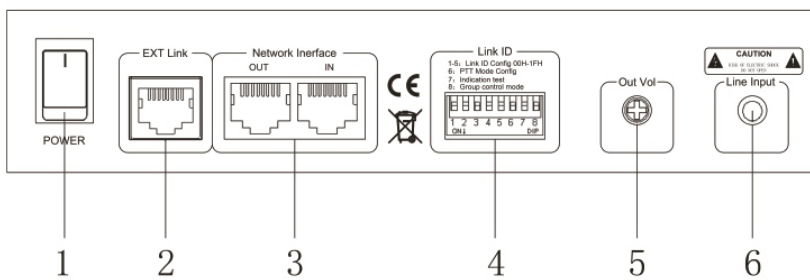

- 1. Paging MIC Power Switch
- 2. Extended Keyboard Connector
- 3. Equipment Online Interface
- 4. Equipment ID Configuration Switch
- 5. Remote Paging MIC Output Audio Sensitivity Controller
- 6. MIC External Line Input Audio

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|----------------|--|-------------------|
| NVS-5003PM16EV | Voice Evacuation System Remote Paging Microphone - 16 Button | 01 |