

# 12-PORT UNSHIELDED DIN RAIL COPPER PATCH PANEL BLANK

The Unshielded din rail patch panel from Norden supports unshielded cabling. It is used for mounting on Din rail TH35 and has rotatable modules which allows cables to top or bottom.




## DESIGN & MATERIALS

Material	Plastic ABS 94V0
Panel Style	Blank
Mounting Style	Din rail
Outlet Style	RJ-45
Outlets	12 ports
Operating Temperature	-10°C to 60°C
Storage Temperature	-40°C to 70°C
Relative Humidity	10% to 85%
Module rotation angle	±27° Angle

## STANDARDS

Standards	DIN EN60715
Flammability rating	UL 94V-0

## DRAWING

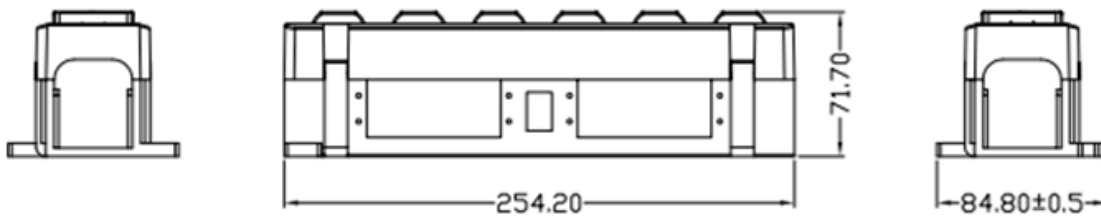

## ORDERING INFORMATION

Part Number	Description	Dimensions (mm)
121-01R18012B	12-Port Unshielded Din Rail Copper patch panel Blank	254.2 x 84.8 x 71.7