


TELEPHONE DROP CABLE NO. 1, 2, 6 & 8

NORDEN Telephone Drop Cable No. 1, 2, 6 & 8 are designed to use for outdoor connections between telephone distribution points and subscriber premises.

The cable consist two parallel conductors with PVC insulation and 8-shape in figure.

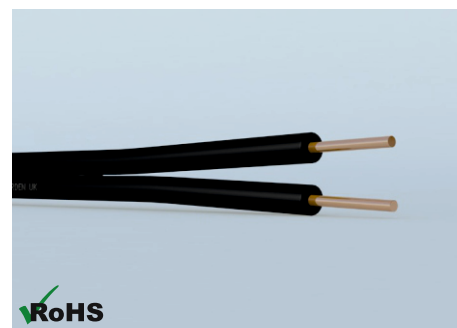

Outer Jacket
Center Conductor

CABLE STANDARD

CW 1166 DROP CABLE NO 1 (0.91 mm)
CW 208 DROP CABLE NO 2 (0.71 mm)
CW 1247 DROP CABLE NO 6 (0.81 mm)
CW 1320A DROP CABLE NO 8 (1.14 mm)

CABLE CONSTRUCTION

Conductor (Drop Wires No. 1)	Solid cadmium copper of 0.91 mm to BS 4807
Conductor (Drop Wires No. 2)	Solid copper covered steel of 0.71 mm to BS 4807
Conductor (Drop Wires No. 6)	Solid copper covered steel of 0.81 mm to BS 4807
Conductor (Drop Wires No. 8)	Solid cadmium copper of 1.14 mm to BS 4807
Insulation (Drop Wires No. 1)	PVC to BS 6746 T1 or PE
Insulation (Drop Wires No. 2)	PVC to BS 6746 T2 or PE
Insulation (Drop Wires No. 6)	PVC to BS 7878 T1 or PE
Insulation (Drop Wires No. 8)	PVC to BS 6746 T1 or PE
Outer Colour	Black, 8-shape figure

PHYSICAL CHARACTERISTICS

Characteristic	Value			
	0.91 mm	0.71 mm	0.81 mm	1.14 mm
BT Drop Wire No	1	2	6	8
Conductor Size	0.65 mm ²	0.4 mm ²	0.52 mm ²	1.02 mm ²
Nom. Insulation Thickness	0.75 mm	1.02 mm	0.8 mm	1.52 mm
Min. Bending Radius	10 x D			
Operating Temperature	-20 °C to +75 °C			
Installation Temperature	-20 °C to +50 °C			

ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Min. Insulation Resistant @ 500 VDC	MΩ.km	50

TELEPHONE DROP CABLE NO. 1, 2, 6 & 8

ORDERING INFORMATION

Part Number	Description	No. of Core	Dimension (mm)
212-11101002	0.91 mm Telephone Drop Cable No. 1	2	2.7 x 5.6
212-14071002	0.71 mm Telephone Drop Cable No. 2	2	2.7 x 6.0
212-12081002	0.81 mm Telephone Drop Cable No. 6	2	2.5 x 5.4
212-15111002	1.14 mm Telephone Drop Cable No. 8	2	4.4 x 9.4
212-14073002	0.71 mm Telephone Drop Cable No. 2	2	2.7 x 5.5

*L1 :1000 mtr , L5 :1500 mtr, L6 :2500 mtr

PACKING INFORMATION

Cable Length (m)	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
500	Ply Reel	21.6	23.0	56.0 x 28.5 x 31.0
1000	Ply Reel	27.0	28.5	26.0 x 28.5 x 35.0