


4 CORE 14 AWG SHIELDED POWER LIMITED FIRE PROTECTIVE SIGNAL CABLE



The UL listed shielded power limited fire protective signal cable from NORDEN is suitable to use for installation in signaling & fire alarm system. This cable is constructed with PVC Insulation, 100 % Aluminium Foil - Polyester Tape Shield with PVC fire protective outer jacket.

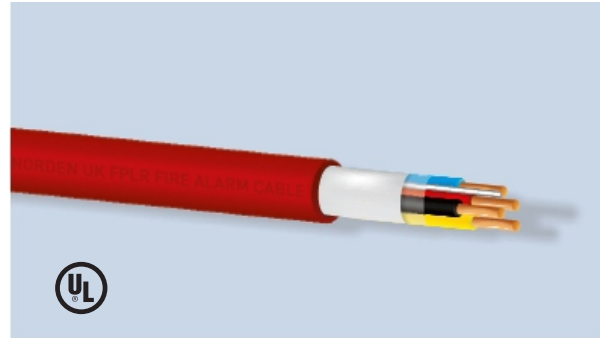

UL File No - E465991

CABLE CONSTRUCTION

Conductor

Solid Bare Copper

Outer Jacket

PVC (UL 1666 Riser)

Shielding

Aluminium Foil - Polyester Tape

Insulation

PVC

Jacket Colour

Red

Foil Coverage

100%

Insulation Colour

4 Core: Red,Black,Yellow,Blue


Standard Packing Mode

305 mtr / Plywood Reel

Drain Wire

Tinned Copper

SECTION VIEW

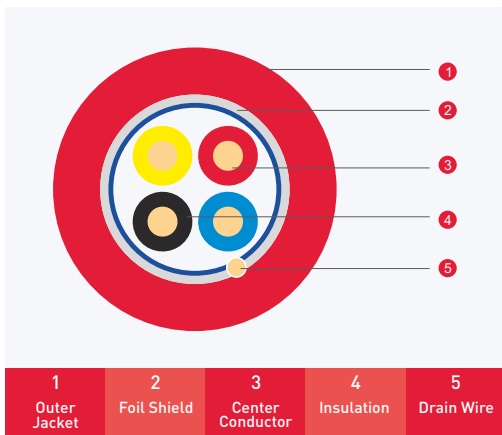

PHYSICAL CHARACTERISTICS

Characteristic	Value
No. of Conductor	4
Conductor Size	14 AWG
Insulation Diameter	2.80 mm
Drain Wire Size	0.25 x 26
Jacket Thickness	1.10 mm
Jacket Diameter	9.4 mm
Max. Recommended Pulling Tension	847 N
Min. Bending Radius Minor Axis	94 mm
Operating Temperature	-20°C to +75°C



4 CORE 14 AWG SHIELDED POWER LIMITED FIRE PROTECTIVE SIGNAL CABLE



ELECTRICAL CHARACTERISTICS

Characteristic	Value	Unit
Nom. Conductor DCR	Ω/km	9.5
Dielectric Strength between Pairs	KV/5min	1.5
Max. Operating Voltage UL	V/min	300

MECHANICAL CHARACTERISTICS

Characteristic	Value
Test Material	PVC
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥100
After Tensile Strength (Mpa)	≥85
Aging Elongation (% of unaged)	≥50
Cold Bend (-20±°C x 4 hrs)	No Crack
Standard & Environmental	UL Style 2464

ORDERING INFORMATION

Part Number	Description
75-1204141	4 CORE 14AWG Shielded Power Limited Fire Protective Signal Cable