

WALL MOUNTED CURVED SPEAKER 10W User manual



OWNER'S MANUAL


Thanks for purchasing PA speaker system of NVS series. All of NVS series products have been tested strictly before shipping. NVS series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES

- 70/100V, 1.5-10W with multiple terminals, suited for different field;
- Max. Sound Pressure Level 100 ± 2 dB, Effective Freq. Range 160Hz-18kHz;
- Weight 1.75kg, equipped with hanging holes for mounting convenient;
- Made of high quality engineering plastic, long-term durability, never out of shape and fade;
- Driver surround excellent damping, provided with high sensitivity


FREQ. RESPONSE

(dB SPL, 1W, 1m)

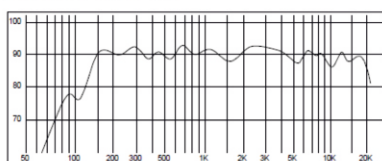


DISTORTION


(THD < 1.5% 1W, 1m, 200Hz-10kHz)

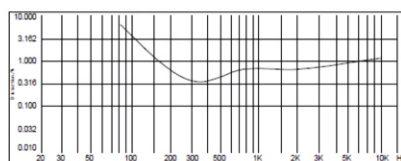

HANGING HOLE

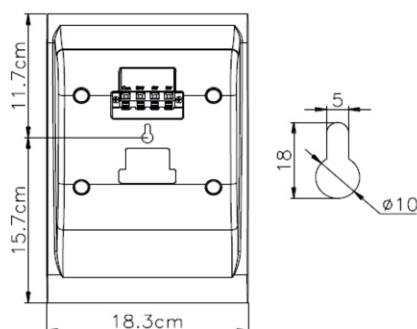

NAIL FOR MOUNTING



INSTALLATION

1. Fit a Ø 4mm nail on wall where it is needed to install a speaker system as shown above.
2. Connect audio broadcasting wire to the terminals according to the table below.

Power Terminals \ Line Voltage	70V	100V
Com---3W	1.5W	3W
Com---6W	3W	6W
Com---10W	5W	10W

3. Position the speaker, then adjust the direction of it and examine whether it is steady.



Norden Communication UK Ltd.

Unit 13 Baker Close, Oakwood Business park, Clacton-On-Sea,
Essex CO15 4BD, United Kingdom
Tel +44 (0) 1255 474063 | E-mail: support@norden.co.uk