

4.5" CEILING SPEAKER 6W
NVS-10240006CS
User manual



INTRODUCTION

Thank you for purchasing PA speaker system of NVS series. All of NVS series products have been tested strictly before shipping. NVS series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It is the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.


FEATURES

- It is made of high quality engineering plastic, and equipped with clamps for installation;
- Different input voltage (70V/100V) can be chosen for different public address wires.


SPECIFICATIONS

| | |
|-------------|----------------|
| Freq. Resp | : 75Hz-20kHz |
| Sensitivity | : 91±2dB |
| Max SPL | : 96±2dB |
| Rated power | : 3W |
| Dimension | : 80x180x180mm |
| Weight | : 0.8Kg |

DIMENSIONS

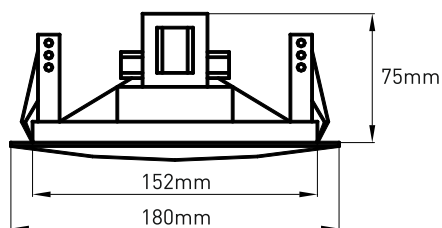

INSTALLATION HOLE

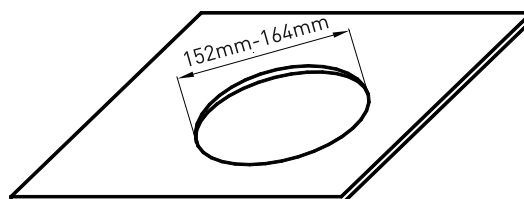

INSTALLATION


1. Cut a Ø154mm - Ø164mm installation hole on ceiling as the picture shown above.
2. Adjust the clamps of the speaker system to make it suitable for different ply of ceiling.
3. Connect public address wire to the terminals. Different connecting type can get different power. See the details in the table below.

| Power Terminals | Line Voltage | 70V | 100V |
|--------------------|--------------|------|------|
| Red--White | | 1.5W | 3W |
| Red--Blue | | 3W | 6W |
| Red--Black | | 5W | XX |

ATTENTION:

The red line must be the common terminal when connecting public address wires.

4. Turn up the clamps of the speaker then insert them into the installation hole on ceiling, Release it as the picture shown below. Put on your gloves for safety is recommended.

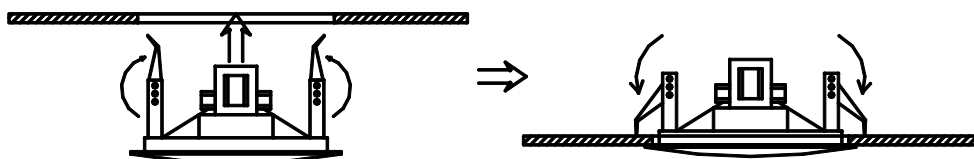

5. Finally, examine whether it is steady.



Norden Communication UK Ltd.

Unit 13 Baker Close, Oakwood Business park, Clacton-On-Sea,
Essex CO15 4BD, United Kingdom
Tel +44 (0) 1255 474063 | E-mail: support@norden.co.uk