

INDOOR COLUMN SPEAKER

User manual



NVS-10740015BS



NVS-10750030BS

PREFACE

Thank you for choosing of NVS audio loudspeaker products. All NVS products have passed rigorous tests before leaving the factory. NVS public address loudspeakers are widely used in schools, stadiums, squares, parks, car parks, railway stations, airports, villas, shopping malls. It is the ideal choice for you to purchase NVS public broadcasting loudspeakers. In order to facilitate your installation, commissioning and use of this product, please read this manual before installation.

FEATURES

- With clear, bright and thorough sound; Clear and thorough sound.
- With surface network of integrated design, elegant, smart, beautiful; The Elegant, Smart and Integrated Design.
- Box is made of high quality fibreboard and birch cold pressed leather to eliminate the box resonant sound.
- In-built 70V/100V Transformer for long distance transmission
- Included Wall mounting kit for easy installation


Material

Surface net : made of nylon high-fiber crystal with good permeability.



Speaker unit : applies 6.5 "color seaweed salvage pulp paper, full-frequency double cone speaker, with wider frequency response.

Transformer : E-type copper wire turns the audio transformer to ensure the audio output fidelity.

Installation kit : with anti-rust process

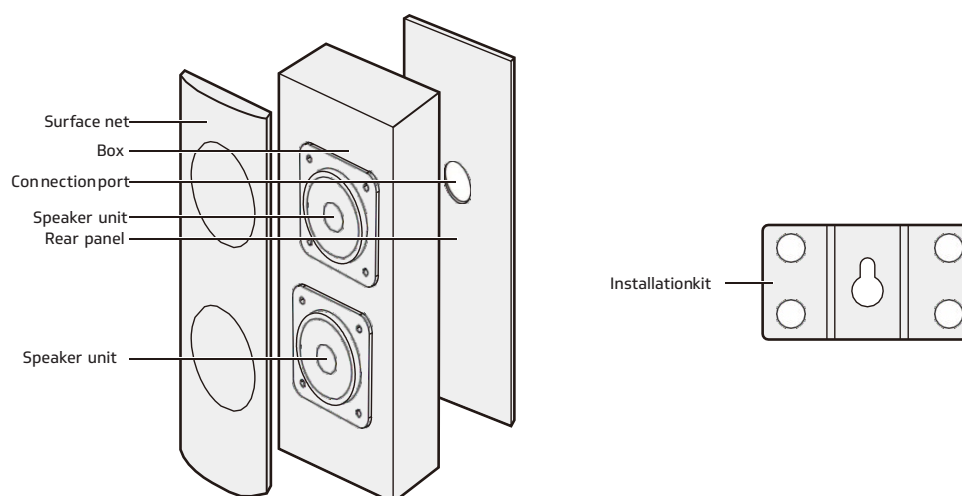



INSTALLATION INSTRUCTION

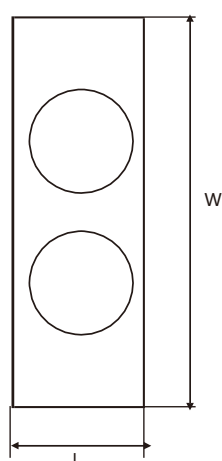


Unit mm


mode	size	L	W	H
NVS-10740015BS		138	120	390
NVS-10750030BS		138	120	602

Vertical installation

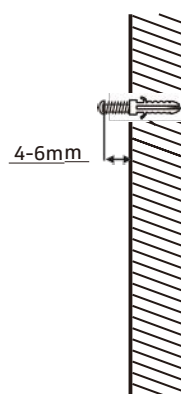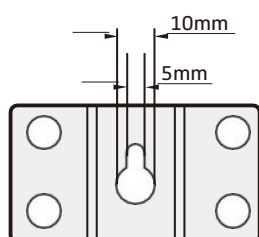

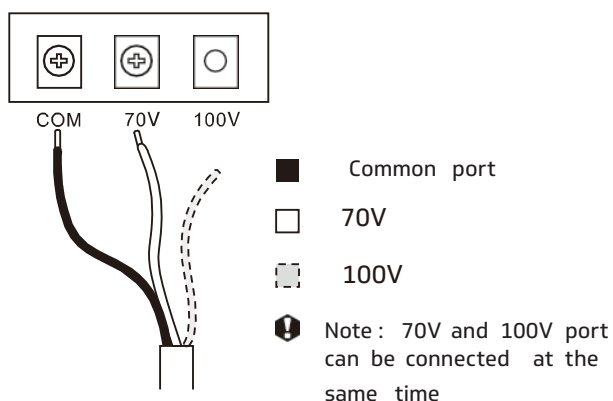

Pic. 2

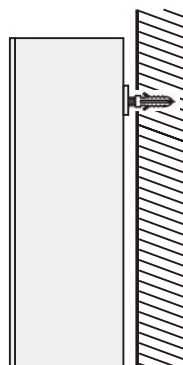

Pic. 3

1. Choose a proper place in a vertical surface where the speaker will be installed on and put a nail with diameter 4mm. The distance between the nail cap and the wall should be 4-6mm (as Pic.1 shows).
2. line connected to public address system as Pic. 2 shows; different port takes different voltage. Refer to the following table for more details

Rated Line votage power port	70V		100V	
	NVS-10740015BS	NVS-10740015BS	NVS-10740015BS	NVS-10740015BS
COM-100V	8W	15W	15W	30W
COM-70V	15W	30W	—	—


Note: "--" means the transmission distance is far and it should be used when the rated power is consumed too much.

3. Last step: Hang the column speaker to the nail (as Pic. 3 shows)

TECHNICAL INDICATOR


Frequency response

(dB SPL, 1W, 1m)

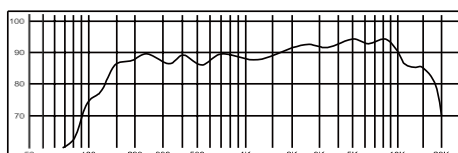

Distortion

(THD< 1.5% 1W, 1m, 200Hz-10kHz)

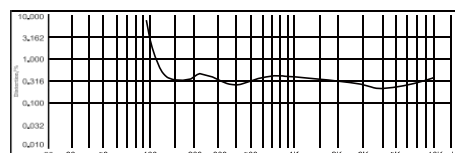

Specification

Model	NVS-10740015BS	NVS-10750030BS
Speaker unit	4" × 2	4" × 4
Freq. range	140Hz-12kHz	140Hz-12kHz
Sensitivity (1m,1W)	90dB± 2dB	94dB± 2dB
Maximum SP(1m)	99dB± 2dB	108dB± 2dB
Rated power	15W	30W
Product size (L × W × H)	138 × 120 × 390mm	138 × 120 × 682mm
Package size(L × W × H)	310 × 220 × 420mm	310 × 220 × 722mm
Net weight (one pair)	6.6kg	10.6kg
Gross weight(one pair)	7.4kg	11.5kg



Norden Communication UK Ltd.

Unit 13 Baker Close, Oakwood Business park, Clacton-On- Sea,
Essex CO15 4BD, United Kingdom
Tel +44 (0) 1255 474063 | E-mail: support@norden.co.uk