

Standalone Vandal Resistant Metal Proximity Reader

This is a waterproof standalone programmable access control system proximity card reader. It supports EM 126KHz card with a user capacity is of 2000. The system meets the IP66 protection standards and is robust enough for external and exposed applications. The inbuilt lock relay can handle up to 2 Amp current.

Application

Office areas, educational facilities, hotels, shopping centres, public and governmental buildings, airports, gyms and leisure centres.

Features


- Vandal Proof Metal case
- IP66
- Support up to 2000 users.
- Card type: 125KHz EM card
- Pulse mode and toggle mode
- Built-in LDR for tamper detection
- Card block enrolment



Technical Parameters

User Capacity	2000 users
Card Type	EM 125KHz
Reading range	3-10 cm
Working Voltage	DC9-24V
Environment	Meets IP66
Relay	One (NO, NC, Common)
Relay open time setting	0-99 Seconds (5 seconds default)
Housing	Powder Coated Zinc-Alloy
Lock Output Load	2 Amp Maximum
Operating Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
Operating Humidity	20% RH ~ 98% RH
Dimension	103 x 48 x 20mm

Dimensions:

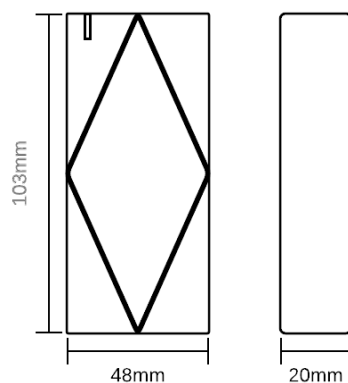

Ordering Information

Part Number	Description
NAC- 5008WA	Waterproof Standalone Metal Access Control