

EMBEDDED NETWORK VIDEO RECORDER



ENR-16064-N-ISK/ENR-16128-N-ISK

FEATURES

- 64/128-Channel input
- Support 2-Ch HDMI, 1-Ch VGA, HDMI at Up to 4K Resolution
- Up to 12 Megapixels resolution recording
- Support H.265+, H.265, H.264 video formats
- Redundant power supply
- 2 decoding cards optional, Up to 12-Ch HDMI
- 16 SATA HDDs (Hot swap), Up to 10TB for each HDD
- Support 2 miniSAS Interfaces
- Support 12V Power output
- ONVIF (Profile S/G)



SPECIFICATION

MODEL	Model No.	ENR-16064-N-ISK	ENR-16128-N-ISK
	Type	64Ch Embedded Network Video Recorder	128Ch Embedded Network Video Recorder
	IP Video Input	64-Ch	128-Ch
	Two-way Audio Input	1-Ch, BNC	
VIDEO & AUDIO	HDMI/VGA Output	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI1 : 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
	Audio Output	1-Ch, BNC	
	Synchronous Playback	16-Ch	
	Incoming Bandwidth	384Mbps	512Mbps
NETWORK	Outgoing Bandwidth	384Mbps	
	Remote Users	128	
	Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
DECODING	Compression	H.265+, H.265, H.264	
	Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
	Capability	4 x 12MP@20, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1	
HARD DISK	SATA	16 SATA interfaces	
	Capacity	Up to 10TB for each HDD	
	eSATA	1 eSATA interface	
	miniSAS	2 miniSAS ports	
	Array Type	RAID 0/1/5/6/10/50/60	
EXTERNAL INTERFACE	Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface	
	Serial Interface	1 x RS232, 1 x Rs485	
	USB Interface	Rear panel: 4 x USB3.0	
	Alarm In	24-Ch	
	Alarm Out	8-Ch	
	Decoding Card (optional)	2 slots (4-ch HDMI or 6-ch HDMI outputs per card)	
	Power Output	12V	



EMBEDDED NETWORK VIDEO RECORDER




ENR-16064-N-ISK/ENR-16128-N-ISK

SPECIFICATION

MODEL	Model No.	ENR-16064-N-ISK	ENR-16128-N-ISK
	Type	64Ch Embedded Network Video Recorder	128Ch Embedded Network Video Recorder
GENERAL	Power Supply	100 ~ 240V AC	
	Consumption (without HDD)	≤50 W	
	Working Temperature	-10°C ~ + 55°C	
	Working Humidity	≤ 90%	
	Chassis	19-Inch Rack-mounted 3U Chassis	
	Dimension	482x477x 131	
	Weight	≤10 Kg	

Dimension Unit: mm

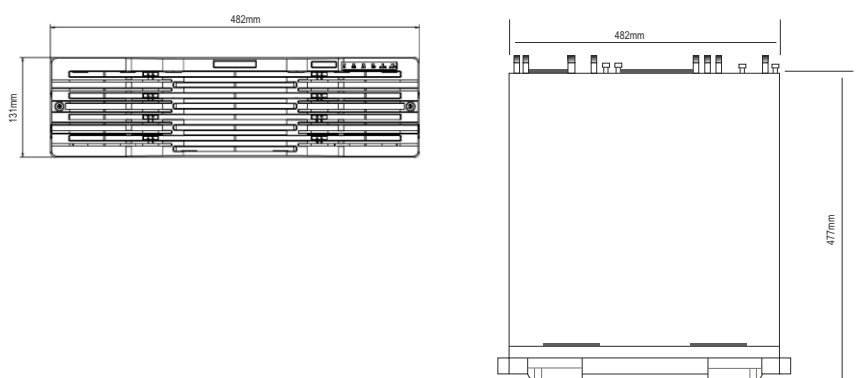

Ordering Information

Part Number	Description	Standard Quantity
ENR-16064-N-ISK	64Ch Embedded Network Video Recorder with 16 Hot Swap HDD Bays Supports 4 × RJ45 1000M 2 × SFP 1000M, 4K Cameras, HDMI, VGA, RAID, Redundant power supply, Smart Analytics and ONVIF	1
ENR-16128-N-ISK	128Ch Embedded Network Video Recorder with 16 Hot Swap HDD Bays Supports 4 × RJ45 1000M 2 × SFP 1000M, 4K Cameras, HDMI, VGA, RAID, Redundant power supply, Smart Analytics and ONVIF	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENR-16064-N-ISK	Carton Box	10	131x482x477
ENR-16128-N-ISK	Carton Box	10	131x482x477

