

16/32CH 4K POE EMBEDDED NETWORK VIDEO RECORDER



ENR-04016-N-16PK/ENR-04032-N-16PK



FEATURES

Support H.265+, H.265, H.264 video formats

16/32-channel input

ONVIF (Profile S/G)

Plug & Play with up to 16 independent PoE network interfaces

HDMI1/VGA and HDMI2 independent outputs provided

Up to 12 Megapixels resolution recording

ANR

4 SATA HDDs, Up to 10TB for each HDD

Support Fisheye dewarping in live view and playback

Support cloud upgrade



UL No: **E491809**



SPECIFICATION

MODEL	Model No.	ENR-04016-N-16PK	ENR-04032-N-16PK
	Type	16 Ch Embedded Network Video Recorder	32 Ch Embedded Network Video Recorder
NETWORK	Incoming Bandwidth	160Mbps	320Mbps
	Outgoing Bandwidth	320Mbps	
	Remote Users	128	
	Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
VIDEO & AUDIO	IP Video Input	16-Ch	32-Ch
	Two-way Audio Input	1-Ch, RCA	
	HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
	Audio Output	1-Ch, RCA	
	Synchronous Playback	16-Ch	
	Corridor Mode Screen	3/4/5/7/9/10/12/16	3/4/5/7/9/10/12/16/32
DECODING	Decoding format	H.265+, H.265, H.264	
	Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
	Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080p@30, 32 x 960p@25	
HARD DISK	SATA	4 SATA interfaces	
	Capacity	up to 10TB for each HDD	
INTERFACE	Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface	
	USB Interface	Front panel: 2 x USB2.0 Rear panel: 1 x USB3.0	
	Serial Interface	1 x RS485	
	Alarm In	16 Ch	
	Alarm Out	4 Ch	
	Power Output	12 VDC	



16/32CH 4K POE EMBEDDED NETWORK VIDEO RECORDER




ENR-04016-N-16PK/ENR-04032-N-16PK

SPECIFICATION

MODEL	Model No.	ENR-04016-N-16PK	ENR-04032-N-16PK
	Type	16 Ch Embedded Network Video Recorder	32 Ch Embedded Network Video Recorder
POE	Interface	16 independent 100 Mbps PoE network interfaces	
	Max Power	Max 30W for single port Max 200W in total (12.5W for each)	
	Supported Standard	IEEE 802.3at	
GENERAL	Power Supply	100 ~ 240 V AC Power Consumption: ≤20 W(without HDD)	
	Working Environment	-10°C ~ + 55°C, Humidity ≤90% RH(Non-condensing)	
	Dimensions	442x425x86mm	
	Weight	≤5.24 Kg	

Dimension Diagram

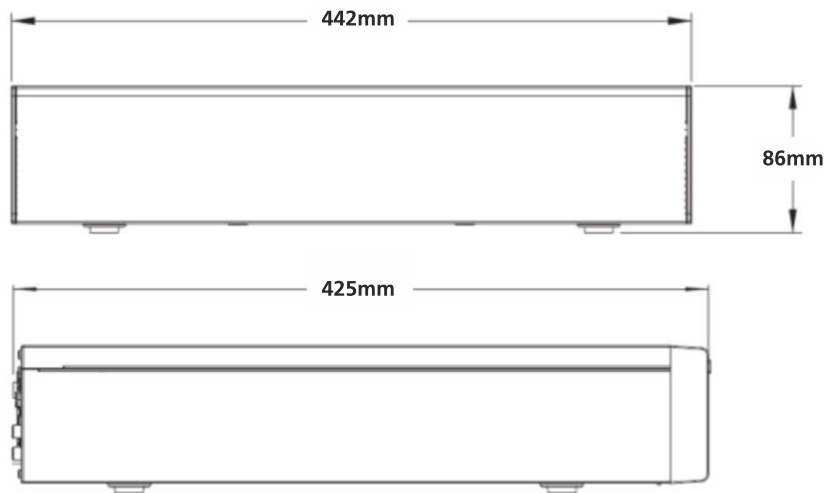

Ordering Information

Part Number	Description	Standard Quantity
ENR-04016-N-16PK	16Ch Embedded Network Video Recorder With 4 HDD Bays Supports 16# POE Ports, 4K cameras, HDMI, VGA and ONVIF	1
ENR-04032-N-16PK	32Ch Embedded Network Video Recorder With 4 HDD Bays Supports 16# POE Ports, 4K cameras, HDMI, VGA and ONVIF	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENR-04016-N-16PK	Carton Box	5.24	442x425x86
ENR-04032-N-16PK	Carton Box	5.24	442x425x86