

4K 12MP H.265 IP LOW LIGHT BOX CAMERA



ENC-HBLCO-00R-18

FEATURES

Auto day/night functionality

2D/3D DNR

H.265+, H.265, H.264, MJPEG

4000*3000 Resolution Supported

Triple streams, ROI


Corridor Mode

ONVIF (Profile S/G), PoE



UL No: E491809

Field Of View

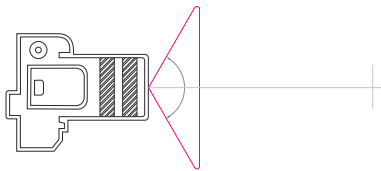

SPECIFICATION

MODEL	Model No.	ENC-HBLCO-00R-18
CAMERA	Type	4K 12MP Starlight H.265 IP Low light Box Camera
	Image Sensor	1/1.7" Progressive scan, CMOS
	Min. Illumination	Colour: 0.005Lux @F1.2 B/W: 0.03Lux @F1.2
	AGC	Auto/Manual
	Shutter	Auto/Manual, 1 ~ 1/100000s
	Lens Mount	CS
	Iris	DC-Iris 4V (4-Pin)/P-Iris 5V (4-Pin)
	Day & Night	Automatically removable IR-cut filter(ICR)
	Digital noise reduction	2D/3D DNR
	Motor Zoom/Auto focus	DC 5V (4-Pin)
	S/N Ratio	>55dB
	Defog	Optical Defog & Digital Defog
	WDR	DWDR
VIDEO & AUDIO	Max.Resolution	4000 x 3000
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 12MP (4000*3000), Max 20fps; 8MP (3840*2160), Max 30fps; 2MP (1920*1080), Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps
	Corridor Mode	Supported
	HLC/BLC	Supported
	OSD	Up to 8 OSDs
	ROI	Up to 8 areas
	Privacy Mask	Up to 8 areas
	Motion Detection	Up to 4 areas
	Audio Compression	G.711U/G.711A
Two-way Talking	Supported	

H.265 IP LOW LIGHT BOX CAMERA - VERSION 1.1



12MP H.265 IP LOW LIGHT BOX CAMERA




ENC-HBLCO-00R-18

SPECIFICATION

MODEL	Model No.	ENC-HBLCO-00R-18
	Type	4K 12MP H.265 IP Low light Box Camera
SMART	Behavior Detection	Intrusion, Cross line, Motion detection
	Intelligent Identification	Face detection, Audio detection, Defocus, Scene Change, Missing Object, Abandoned Object
	Statistical Analysis	People counting
	General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
NETWORK	Protocols	IPv6, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
	Compatibility	ONVIF (Profile S/G), API
	Network	100M/1000M Base-FX SFP+100M/1000M Base-TX Ethernet
INTERFACE	Audio I/O	1/1
	Alarm I/O	2/1
	Serial Port	1 RS485
	BNC	Supported
GENERAL	Power	AC 24V±25%, DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 9.5W
	Storage	Micro SD, Up to 256 GB
	ANR	Supported
	Working Environment	20°C ~ 60°C (-4°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Dimension	151.5x71x65mm
	Weight	0.48Kg
	Reset Button	Supported

Dimension Unit: mm

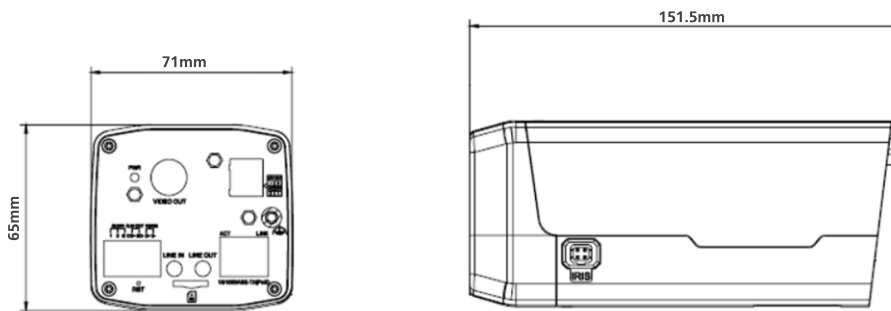

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBLCO-00R-18	12MP H.265 IP Low light Box camera with CS mount Lens interface, POE, SD card Slot, SFP Slot and Smart Analytics support (Without Lens)	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBLCO-00R-18	Carton Box	0.48	151.5x71x65

