

2MP H.265 IR IP BULLET CAMERA




ENC-HBU5F-30R-61

FEATURES

1/2.9" Progressive Scan CMOS
2.8mm (3.6mm optional)
25fps/30fps@2MP
Smart IR Up to 30m
IP66



Field Of View

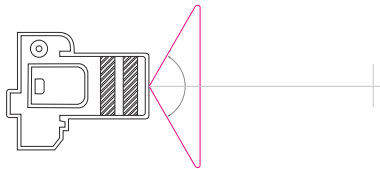

SPECIFICATION

MODEL	Model No.	ENC-HBU5F-30R-61
CAMERA	Type	2MP H.265 IR IP Bullet Camera
	Image Sensor	1/2.9" Progressive Scan CMOS
	Lens	3.6mm (2.8mm optional)
	Iris	Fixed Iris
	Angle of View	80°
	Shutter	1/5-1/20000s
	Min. illumination	Color:0.01Lux@F1.2, B/W: 0 Lux@(IR LED ON)
	AGC	Auto/Manual
	Day/Night	ICR
	Digital Noise Reduction	2D/3D
	S/N	55dB
	Smart IR	Up to30M
	Defog	Digital Defog
	WDR	dWDR
VIDEO	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 1920x1080/1280x720 @25/30fps Sub Stream: 704x576/640x360/480x360/352x288 @25/30fps
	ROI	Supported
	HLC/BLC	Supported
	Motion Detection	Supported
	Privacy Masking	Supported
Smart Functions	Virtual fence, Face detection, Human detection, Advanced motion detection	



2MP H.265 IR IP BULLET CAMERA



ENC-HBU5F-30R-61

SPECIFICATION

MODEL	Model No.	ENC-HBU5F-30R-61
	Type	2MP H.265 IR IP Bullet Camera
INTERFACE	Protocols	IPv4, IPv6 HTTP, HTTPS, TCP/UDP, RTSP/ RTP/RTCP, DHCP, NTP, SMTP, DNS, UPnP, SNMP
	Compatibility	ONVIF (Profile S/G)
	Network	1 Ethernet (10/100 Base-T) RJ-45 Connector
GENERAL	Power	DC 12V/POE (IEEE 802.3af)
	Power Consumption	3.5W
	Working Environment	-15°C ~ 55°C, Humidity: < 90% RH
	Ingress Protection	IP66
	Dimensions	172.5x67.5x63mm
	Weight	0.32Kg

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5F-30R-61	2MP H.265 IR IP Bullet camera with 3.6mm (2.8mm optional) Fixed lens, POE, Smart Analytics and 30m IR Support.	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU5F-30R-61	Carton Box	0.32	172.5x67.5x63

