

2MP H.265 IR IP BULLET CAMERA




ENC-HBU5V-50R-68

FEATURES

- 1/2.7" progressive scan CMOS
- 2.8~12mm Varifocal lens
- 25/30fps@2MP
- Triple streams
- Smart IR Up to 50M
- IP67



Field Of View

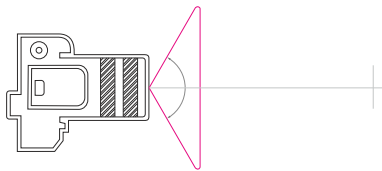

SPECIFICATION

MODEL	Model No.	ENC-HBU5V-50R-68
CAMERA	Type	2MP H.265 IR IP Bullet Camera
	Image Sensor	1/2.7" Progressive Scan CMOS
	Lens	2.8~12mm Varifocal lens
	Iris	Fixed Iris
	Angle of View(H)	103° ~ 34.3°
	Shutter	1/5-1/20,000s
	Min. illumination	Color:0.01Lux @ F1.2, B/W: 0 Lux @IR LED ON
	AGC	Auto/Manual
	Day/Night	ICR
	Digital noise reduction	2D/3D DNR
	S/N	55dB
	Smart IR	Up to 50m
	Defog	Digital Defog
	WDR	120dB
	VIDEO	Max. Resolution
Video Compression		H.265+, H.265, H.264, MJPEG
Frame Rate		Main Stream : 1920x1080/1280x720 @25/30fps Sub Stream : D1/VGA/640x360/CIF/QVGA @25/30fps Third Stream : VGA/CIF/QVGA @25/30fps
Streaming Capability		Triple Stream
ROI		Support
HLC/BLC		Support
Privacy Masking		Supported
SMART	Motion Detection	Supported
	Behavior Detection	Perimeter, Single Virtual Fence, Double Virtual Fences
	Intelligent Identification	Loiter, Multi Loiter, Abandoned Object, Missing Object
	Statistical Analysis	Abnormal Speed, Converse, Illegal Parking, Signal Bad



2MP H.265 IR IP BULLET CAMERA




ENC-HBU5V-50R-68

SPECIFICATION

MODEL	Model No.	ENC-HBU5V-50R-68
	Type	2MP H.265 IR IP Bullet Camera
INTERFACE	Protocols	IPv4, IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
	Compatibility	ONVIF (Profile S/G)
	Network	1 Ethernet (10/100 Base-T) RJ-45 Connector
GENERAL	Power	DC 12V/POE (IEEE 802.3af)
	Power Consumption	5.5W
	Working Environment	-30°C ~ 50°C, Humidity: < 90% RH
	Ingress Protection	IP67
	Dimensions	232x74.8x80mm
Net Weight	0.70Kg	

Dimension Unit: mm

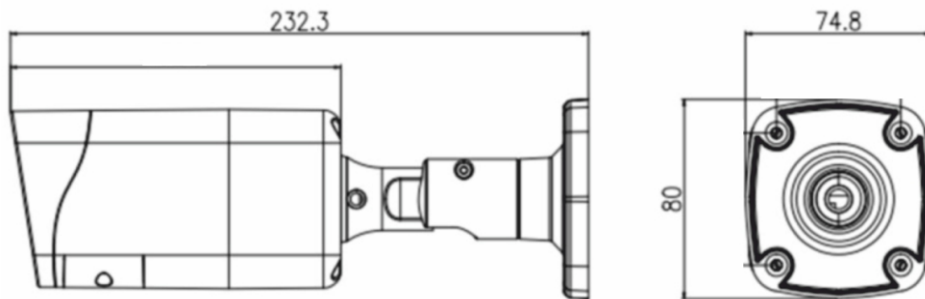

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5V-50R-68	2MP H.265 IR IP Bullet camera with 2.8 to 12mm Varifocal lens, POE, WDR, Analytic feature and 50M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU5V-50R-68	Carton Box	0.70	232x74.8x80

