HORIZONTAL DIVIDED DOOR FLOOR STANDING CABINET



The Easycab range of floor standing cabinets designed for communication rooms and data centers. The smart design and professional engineering provides easy installation and maintenance. Comply with ANSI/EIA RS-310-D, IEC 297-2, DIN 41491, PART 1, DIN 41497, PART 7, GB/T3047.2- 92, ETSI standards.

FEATURES

- Intelligent design ensures easy installation
- Cable entry through bottom and top panel
- Key lock horizontally divide side panel provides easy maintenance
- Horizontal divided door
- 19" installation
- Adjustable feet and heavy duty castors
- Plinth (optional)

Cabinet Material	SPCC cold rolled steel		
Deg. of Protection	IP20		
Surface finish	Degreasing, phosphoric, powder coated		
Max. Loading capacity	1200 KGS		
Mounting-rails thickness	2.0mm		
Door thickness	1.2mm		
End plates and side panels thickness	1.2mm		
Max. Capacity on each caster	300KG		
Door Perforation in percentage	71%		
Max. rotation degree Hinges	225°		
Angle at which door opens when placed alone	225°		
Angle at which door opens (connected together)	180°		
Earthing	Yes		

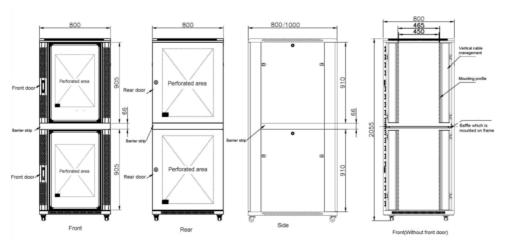


Fig 1: 42U 800X1000

EASYCAB

HORIZONTAL DIVIDED DOOR FLOOR STANDING CABINET

ACCESSORIES

Accessories	Material Of Construction	Surface Coating & Colour	Quantity
Top cover	1.2 mm SPCC cold rolled steel	Powder coating	1 piece
Spring Lock with 2 keys	-	Black	1 piece
Mounting Angle, 4 Pcs for lower 32U	1.5 mm SPCC cold rolled steel	Powder coating	6 piece
Front door, round vented border	1.2 mm SPCC cold rolled steel	Powder coating	1 piece
2" heavy duty castors	-	-	4 piece
Mounting Profile	2.0 mm SPCC cold rolled steel	Powder coating	4 piece
Small round Lock with 2 keys		Nickel coating	1 piece
Frame	1.2 mm SPCC cold rolled steel	Powder coating	2 piece
M6 Square nut, 40 sets for upper 32U	steel	Zinc Colour	20 piece
M6 B head screw, 40 sets for upper 32U	steel	Zinc Colour	20 piece
Side Panel	1.2 mm SPCC cold rolled steel	Powder coating	2 piece
Square hole rear door, square vent	1.2 mm SPCC cold rolled steel	Powder coating	1 piece
Bottom panel	1.2 mm SPCC cold rolled steel	Powder coating	1 piece
Allen wrench	steel	Black Colour	1 piece
M12 adjustable feet	-	-	4 piece

ORDERING INFORMATION

Part Number	Description	Capacity (U)	Dimension(mm)
132H-4281CCBK	42U 800x1000 Front Perforated Horizontally Divided & Back Perforated Horizontally Divided Door Cabinet with Key Lock Horizontally Divide Side Panel	42	800x1000x2055
132H-4881CCBK	48U 800x1000 Front Perforated Horizontally Divided & Back Perforated Horizontally Divided Door Cabinet with Key Lock Horizontally Divide Side Panel	48	800x1000x2322

PACKING INFORMATION

Part Number	Packing Qty.	Packing Mode	N.W (kg)	G.W (kg)	Gross Volume* [CBM]
132H-4281CCBK	3 x Flat Packing	Carton Box	132.5	143.2	0.805
132H-4881CCBK	3 x Flat Packing	Carton Box	136.0	147.2	0.893