

# 4MP H.265 IR IP COMPACT BULLET CAMERA




ENC-HCB7F-30R-68

## FEATURES

- 1/3" Progressive Scan CMOS
- 2.8mm (Optional 3.6mm) Fixed lens
- 25fps/30fps@4MP
- Triple Streams
- Smart IR Up to 30M
- IP67, IK10 optional



## Field Of View

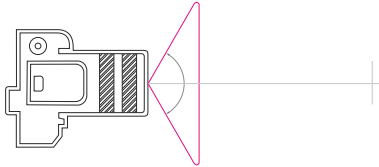

## SPECIFICATION

MODEL	Model No.	ENC-HCB7F-30R-68
CAMERA	Type	4MP H.265 IR IP Compact Bullet camera
	Image Sensor	1/3" Progressive Scan CMOS
	Lens	2.8mm (3.6mm optional) Fixed Lens
	Iris	Fixed Iris
	Angle of View (H)	100°
	Shutter	1/5-1/20000s
	Min. illumination	Color:0.05Lux@F1.2, B/W:0Lux@IR LED ON
	AGC	Auto/Manual
	Day/Night	ICR
	Digital noise reduction	2D/3D DNR
	S/N	>55dB
	Defog	Digital Defog
	Smart IR	Up to 30M
	WDR	120dB
VIDEO	Max. Resolution	2592x1520
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream : 2592x1520/2560x1440/2304x1296/1920x1080/1280x720 @25/30fps Sub Stream : D1/VGA/640x360/CIF/QVGA @25/30fps Third Stream : VGA/CIF/QVGA @25/30fps
	Streaming Capability	Triple Stream
	HLC/BLC	Supported
	ROI	Supported
SMART	Privacy Masking	Supported
	Motion Detection	Supported
	Behavior Detection	Perimeter, Single Virtual Fence, Double Virtual Fences
	Intelligent Identification	Loiter, Multi Loiter, Abandoned Object, Missing Object
	Statistical Analysis	Abnormal Speed, Converse, Illegal Parking, Signal Bad



# 4MP H.265 IR IP COMPACT BULLET CAMERA




ENC-HCB7F-30R-68

## SPECIFICATION

MODEL	Model No.	ENC-HCB7F-30R-68
	Type	4MP H.265 IR IP Compact Bullet camera
INTERFACE	Protocols	IPv4, IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
	Compatibility	ONVIF (Profile S/G)
	Network	Ethernet (10/100 Base-T) RJ-45 Connector
GENERAL	Power	DC 12V/POE (IEEE 802.3af)
	Power Consumption	5.5W
	Working Environment	-30°C ~ 50°C, Humidity: <90% RH
	Ingress Protection	IP67
	Dimensions	154x63x63mm
Net Weight	0.4Kg	

Dimension Unit: mm

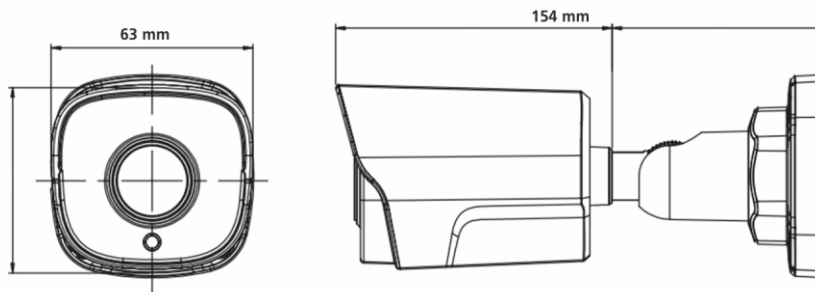

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HCB7F-30R-68	4MP H.265 IR IP Compact Bullet camera with 2.8mm (Optional 3.6mm) Fixed lens, POE, WDR, Analytic feature and 30M IR support	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HCB7F-30R-68	Carton Box	0.4	154x63x63mm

